

Using the C18 Compiler to Interface Microwire Serial EEPROMs to PIC18 Devices

Author: Chris Parris
Microchip Technology Inc.

INTRODUCTION


There are many different microcontrollers on the market today that are being used in embedded control applications. Many of these embedded control systems need nonvolatile memory. Because of their small footprint, byte level flexibility, low I/O pin requirement, low power consumption and low cost, serial EEPROMs are a popular choice for nonvolatile storage.

Microchip Technology has addressed these needs by offering a full line of serial EEPROMs covering industry standard serial communication protocols for two-wire (I²C™), three-wire (Microwire), and SPI™ communication. Serial EEPROM devices are available in a variety of densities, operational voltage ranges, and packaging options.

This application note provides assistance and source code to ease the design process of interfacing a Microchip PIC18F1220 PICmicro® microcontroller to a Microchip Microwire serial EEPROM, without the use of a hardware serial port.

Figure 1 depicts the hardware schematic for the interface between Microchip's Microwire devices and the Microchip PIC18F1220 microcontroller. The schematic shows the necessary connections to interface the microcontroller and the serial EEPROM (the firmware was written assuming these connections).

FIGURE 1: CIRCUIT FOR PIC18F1220 AND 93 SERIES (MICROWIRE) DEVICE

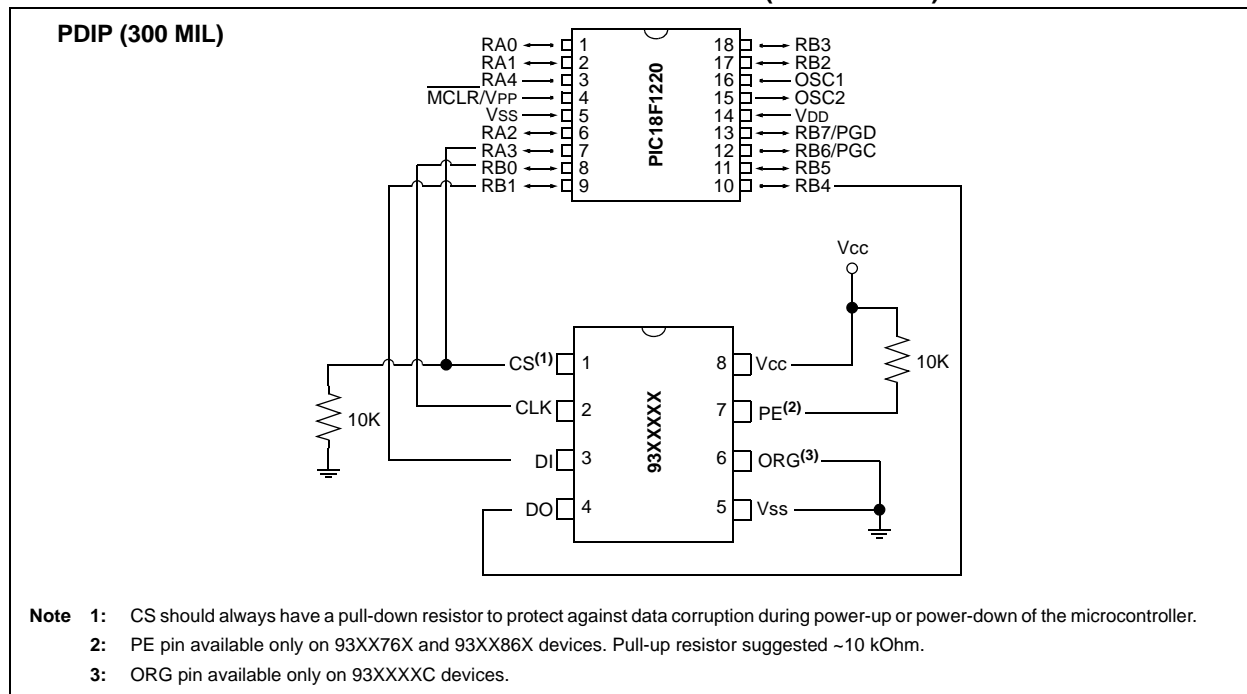

FIRMWARE DESCRIPTION

The purpose of the program is to show individual features of the Microwire protocol and give code samples of the Start bit, opcodes and addressing schemes, so that the basic building blocks of a program can be shown. The firmware performs five basic operations:

- Erase/Write Enable command
- Write command for one word of data
- Ready/Busy polling
- Read command for one word of data
- Erase/Write Disable command

Functions are provided for both 8-bit and 16-bit organizations. However, only the 8-bit functions are exhibited in this application note.

The 8-bit functions were tested using the 93LC66A serial EEPROM, featuring 512 x 8 (4 Kbit) of memory and 8-bit organization. The 16-bit functions were tested using the 93LC66B serial EEPROM, which features 256 x 16 (4 Kbit) of memory and 16-bit organization. The provided screenshots are of the 8-bit functions only.

A 10 MHz crystal oscillator is used to clock the PIC18F1220. If a faster clock is used, the code may need to be modified to ensure all timing specs are met. The waveforms provided are shown from CS active to CS disable so an entire instruction can be seen. To ease the interpretation of the serial data, the data sheet waveforms are provided below the oscilloscope screen shots. All values represented in this application note are decimal values unless otherwise noted.

Device Setup

Although this application note focuses on the 93LC66A device, the firmware supports all 93XXXX devices. This is done by setting the NUMBITS constant at the beginning of the source code.

The NUMBITS constant is used in the output subroutines to determine how many bits are required to be output. More specifically, it is used by the EWEN and EWDS commands to calculate the number of dummy bits required. It is also used by the Read and Write subroutines to skip over the unused bits in the address word. This constant must equal the required number of clock cycles for an EWEN command (12 for the 93XX66A).


<p>Note: On devices of the same density, the required number of clock cycles differs between 8-bit and 16-bit organizations. Therefore, if the organization is changed, NUMBITS must be updated appropriately.</p>

WRITE ENABLE

Figure 2 shows an example of the Erase/Write Enable (EWEN) command. Chip Select is brought high (active), and the Start bit and four-bit opcode ('0011') are sent out first, with the required number of dummy bits (7 for the 93XX66A) following.

The EWEN command must be given before a write is attempted. The device will be enabled for writes until an Erase/Write Disable command is given or the device is powered down.

FIGURE 2: ERASE/WRITE ENABLE (EWEN)


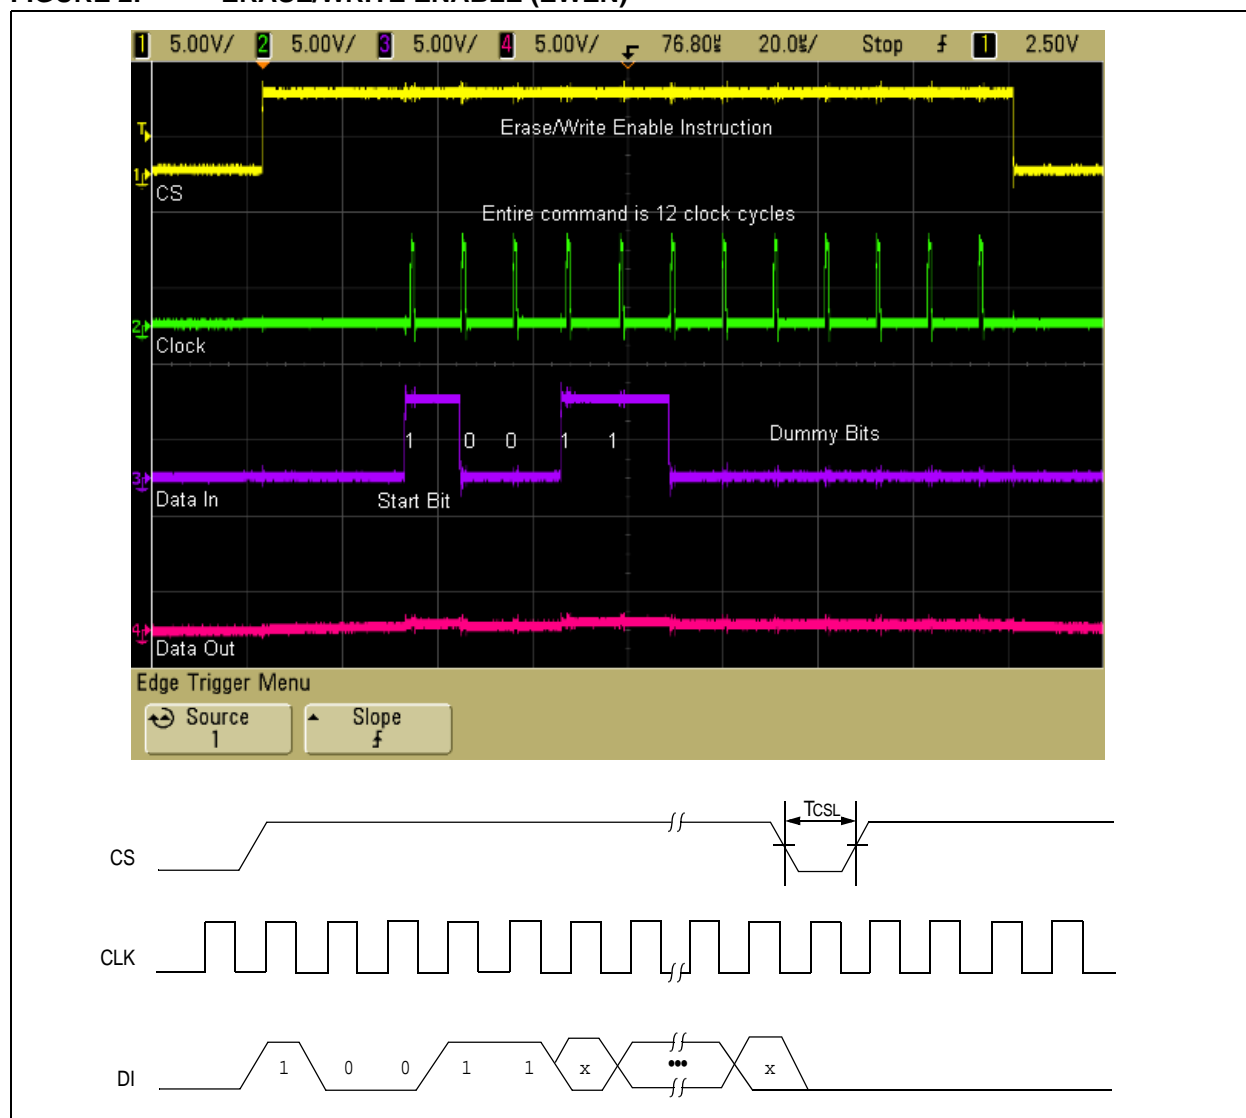


WRITE COMMAND (START BIT, OPCODE, ADDRESS AND DATA)

Figure 3 shows an example of the Write command. The device is selected and the Start bit, opcode and the word address are sent out. Next, the data is clocked out to the device. When the Chip Select is toggled, the internal write cycle is initiated.

Once the internal write cycle has begun, the Ready/Busy signal can be polled on the DO pin to check when the write finishes. A 6 ms delay needs to be added if the Ready/Busy status is not being polled. This code uses Ready/Busy polling.

FIGURE 3: WRITE COMMAND, ADDRESS AND DATA

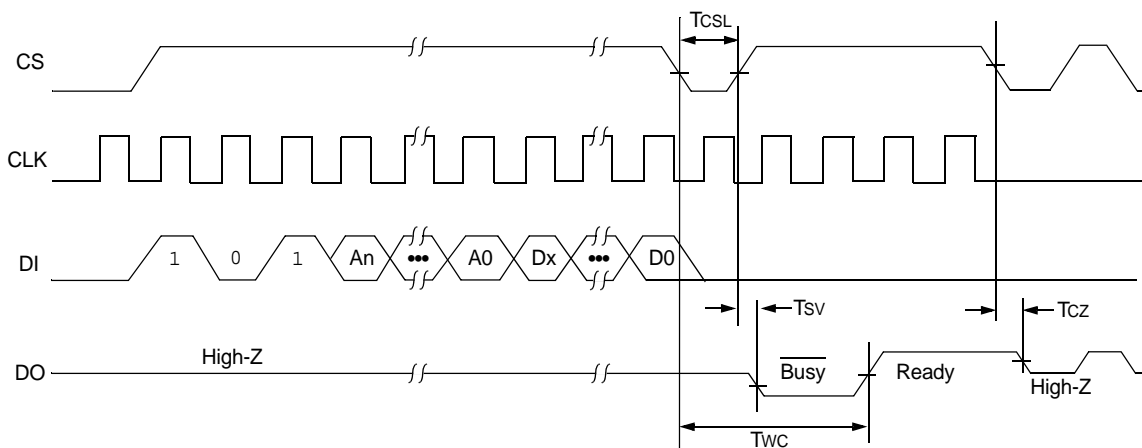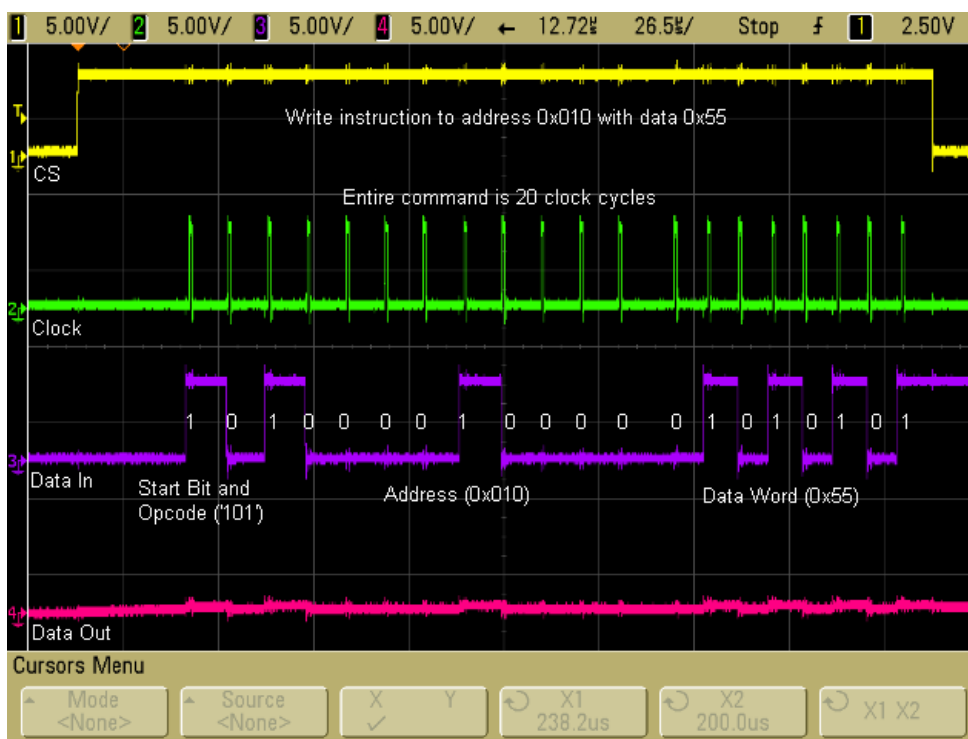


READY/BUSY POLLING

After a valid Write command is given, the DO line of the 93XXXX can be monitored to check if the internal write cycle has been successfully initiated and, if so, to determine when the write cycle is complete. The oscilloscope plot below shows that the device is selected and the DO line is low for approximately 3.0 ms before the device brings the DO line high, indicating that the write cycle is complete.

Note that the 93AAXX and 93LCXX devices have a maximum program cycle time (T_{wc}) of 6 ms, but in this example, the write cycle only lasted 3.0 ms.

This illustrates that the write cycle typically is much shorter than the specified maximum. Therefore, it can be highly beneficial to take advantage of the Ready/Busy polling feature, so as to increase efficiency when writing multiple words of data to the device.


FIGURE 4: READY/BUSY POLLING

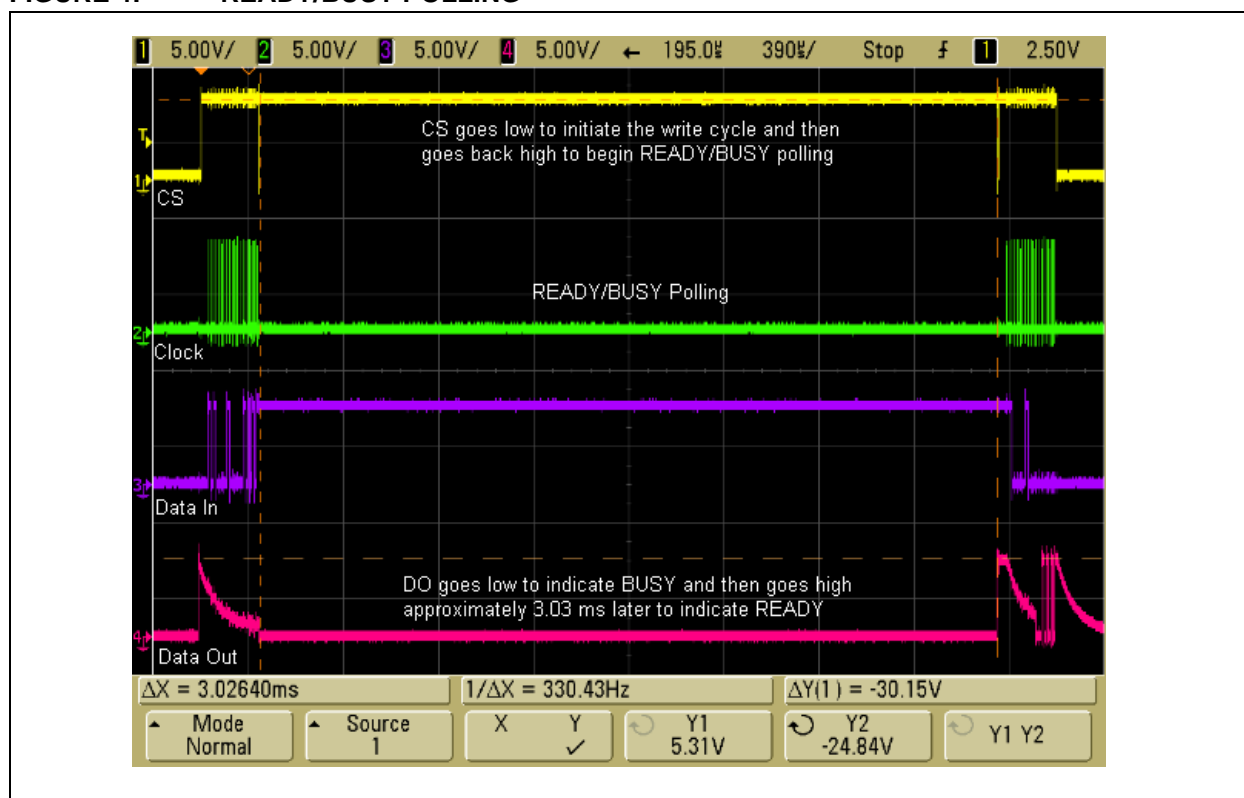

READ COMMAND (START BIT, OPCODE, ADDRESS AND DATA)

Figure 5 shows an example of the Read command. The device is selected and the Start bit, opcode and the word address are sent out. At this point, the device gets ready to transmit data. The microcontroller must generate the clock signals and read DO on each falling clock edge. In this example, the data being read is 0x55.

FIGURE 5: READ COMMAND

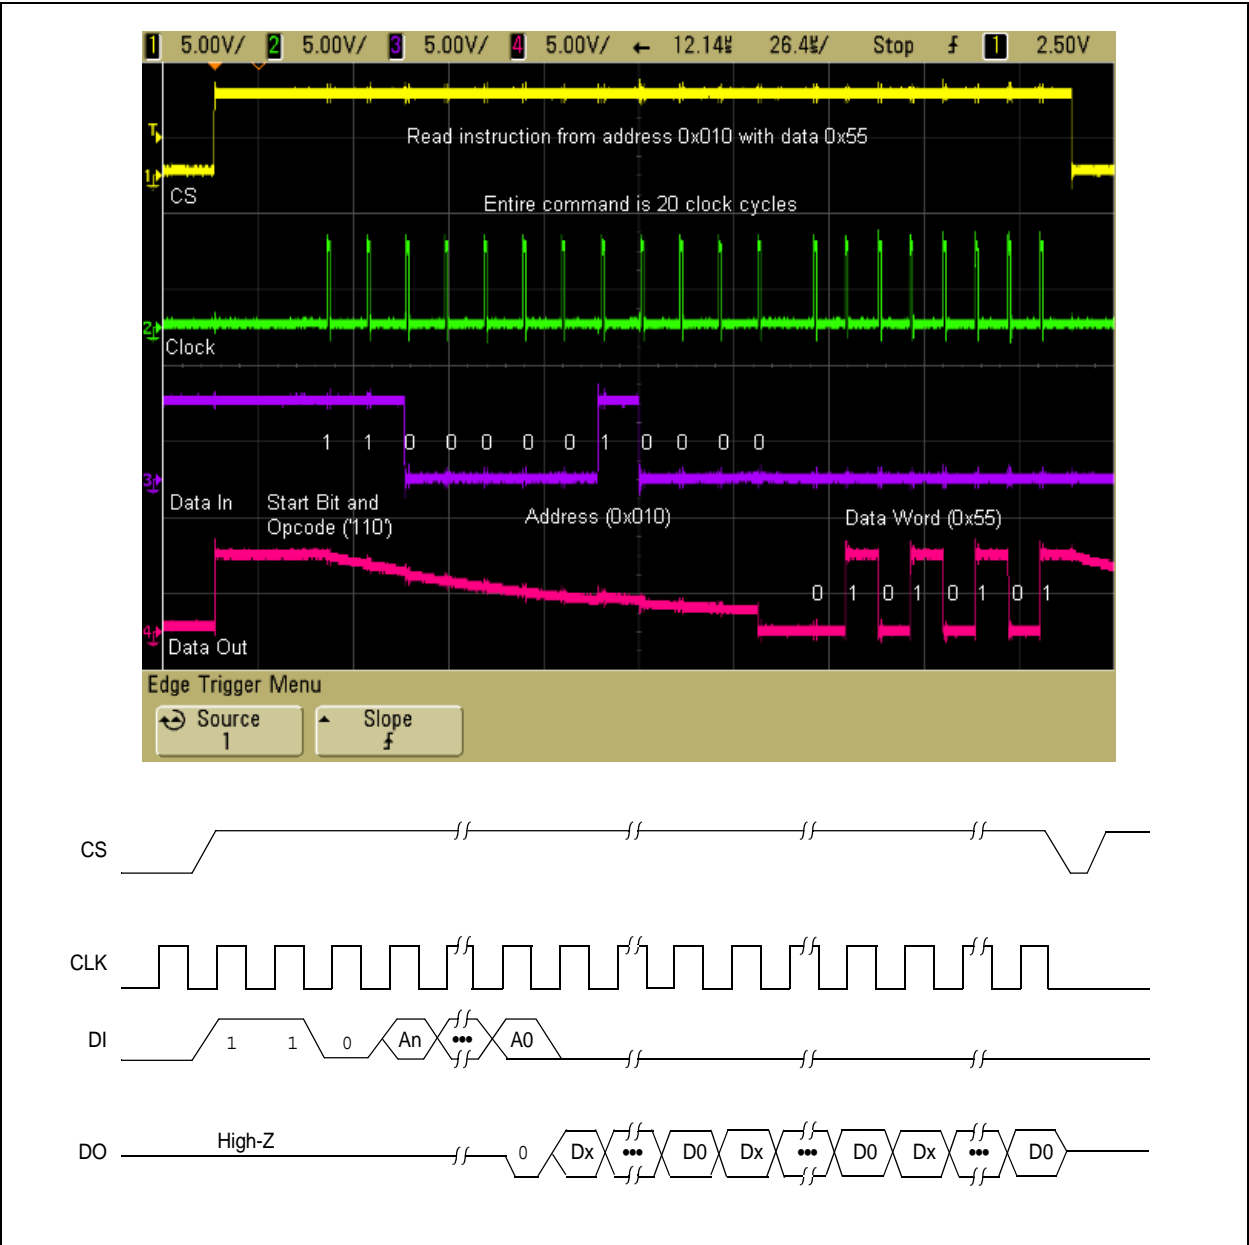


ERASE/WRITE DISABLE COMMAND

Once the internal write cycle is complete, the Write Disable (EWDS) command should be given (see Figure 6). This command consists of a Start bit and the four-bit opcode ('0000'), followed by the appropriate number of dummy bits (7 for the 93XX66A).

The EWDS command should always be sent to the device after completing a write or prior to powering down the device/system.

FIGURE 6: ERASE/WRITE DISABLE COMMAND

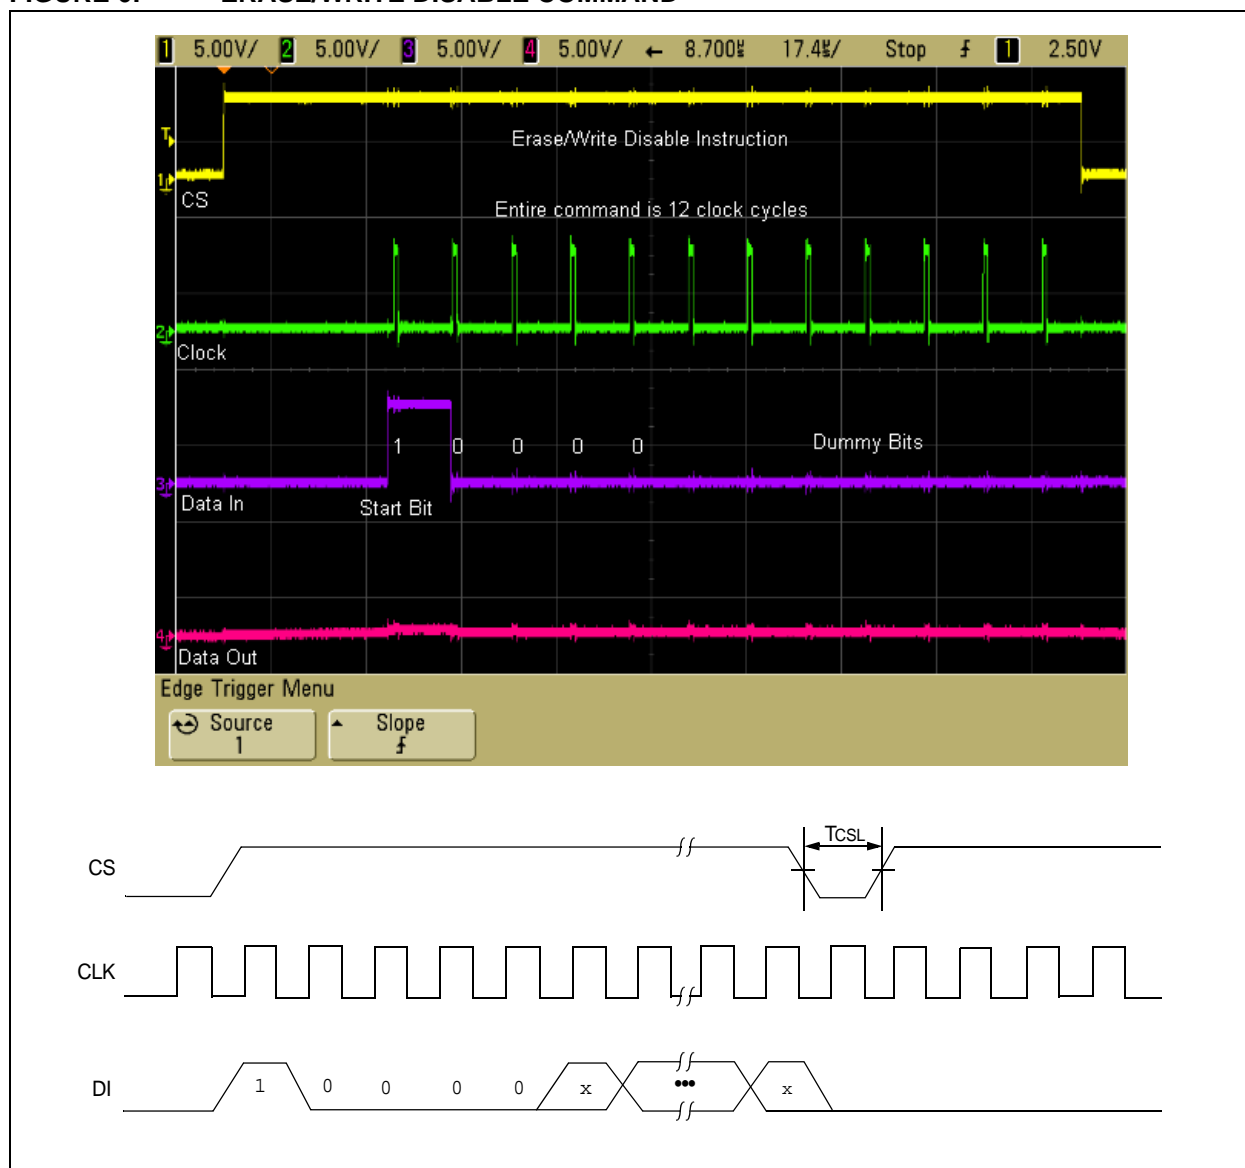

CONCLUSION

These are some of the basic features of Microwire communications on one of Microchip's PIC18 devices without the use of a hardware serial port. The code is highly portable and can be used on many PICmicro® microcontrollers, with very minor modifications. Using the code provided, designers can begin to build their own Microwire libraries to be as simple or as complex as needed.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELOQ, microID, MPLAB, PIC, PICmicro, PICSTART, PRO MATE, PowerSmart, rPIC, and SmartShunt are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.


AmpLab, FilterLab, Migratable Memory, MXDEV, MXLAB, PICMASTER, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, dsPICDEM, dsPICDEM.net, dsPICworks, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, Linear Active Thermistor, MPASM, MPLIB, MPLINK, MPSIM, PICKit, PICDEM, PICDEM.net, PICLAB, PICtail, PowerCal, PowerInfo, PowerMate, PowerTool, rLAB, rPICDEM, Select Mode, Smart Serial, SmartTel, Total Endurance and WiperLock are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2005, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949:2002 ==

Microchip received ISO/TS-16949:2002 quality system certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona and Mountain View, California in October 2003. The Company's quality system processes and procedures are for its PICmicro® 8-bit MCUs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://support.microchip.com>
Web Address:
www.microchip.com

Atlanta

Alpharetta, GA
Tel: 770-640-0034
Fax: 770-640-0307

Boston

Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago

Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas

Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit

Farmington Hills, MI
Tel: 248-538-2250
Fax: 248-538-2260

Kokomo

Kokomo, IN
Tel: 765-864-8360
Fax: 765-864-8387

Los Angeles

Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

San Jose

Mountain View, CA
Tel: 650-215-1444
Fax: 650-961-0286

Toronto

Mississauga, Ontario,
Canada
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8528-2100
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8676-6200
Fax: 86-28-8676-6599

China - Fuzhou
Tel: 86-591-8750-3506
Fax: 86-591-8750-3521

China - Hong Kong SAR
Tel: 852-2401-1200
Fax: 852-2401-3431

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8203-2660
Fax: 86-755-8203-1760

China - Shunde
Tel: 86-757-2839-5507
Fax: 86-757-2839-5571

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7250
Fax: 86-29-8833-7256

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-2229-0061
Fax: 91-80-2229-0062

India - New Delhi
Tel: 91-11-5160-8631
Fax: 91-11-5160-8632

India - Pune
Tel: 91-20-2566-1512
Fax: 91-20-2566-1513

Japan - Yokohama
Tel: 81-45-471- 6166
Fax: 81-45-471-6122

Korea - Gumi
Tel: 82-54-473-4301
Fax: 82-54-473-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Penang
Tel: 604-646-8870
Fax: 604-646-5086

Philippines - Manila
Tel: 632-634-9065
Fax: 632-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-572-9526
Fax: 886-3-572-6459

Taiwan - Kaohsiung
Tel: 886-7-536-4818
Fax: 886-7-536-4803

Taiwan - Taipei
Tel: 886-2-2500-6610
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Weis
Tel: 43-7242-2244-399
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Spain - Madrid
Tel: 34-91-352-30-52
Fax: 34-91-352-11-47

UK - Wokingham
Tel: 44-118-921-5869
Fax: 44-118-921-5820