

Downloading HEX Files to External FLASH Memory Using PIC17CXXX PICmicro® Microcontrollers

*Author: Rodger Richey
Microchip Technology Inc.*

INTRODUCTION

The PIC17CXXX devices have the capability to interface external FLASH memory into the 64K x 16 program memory space. Coupled with this feature is the ability to read and write to the entire program memory of the device. Using one of the standard serial interfaces on the PICmicro (USART, SPI, I²C™), a complete hex file can be downloaded into the external FLASH memory by a bootloader program. The PIC17CXXX family consists of seven devices as shown in Table 1

TABLE 1 FEATURES LIST


Features	PIC17C42A	PIC17C43	PIC17C44	PIC17C756A	PIC17C762	PIC17C766
Max Freq for Ops	33 MHz	33 MHz	33 MHz	33 MHz	33 MHz	33 MHz
Op Voltage Range	2.5V - 6.0V	2.5V - 6.0V	2.5V - 6.0V	3.0V - 5.5V	3.0V - 5.5V	3.0V - 5.5V
Prog Memory x16	2K	4K	8K	16K	8K	16K
Data Memory (bytes)	232	454	454	902	678	902
Hardware Multiplier	Yes	Yes	Yes	Yes	Yes	Yes
Timers	4	4	4	4	4	4
Capture Inputs	2	2	2	4	4	4
PWM Outputs	2	2	2	3	3	3
USART/SCI	1	1	1	2	2	2
A/D Channels	-	-	-	12	16	16
Power-on Reset	Yes	Yes	Yes	Yes	Yes	Yes
Brown-out Reset	-	-	-	Yes	Yes	Yes
ICSP	-	-	-	Yes	Yes	Yes
Watchdog Timer	Yes	Yes	Yes	Yes	Yes	Yes
Interrupt Sources	11	11	11	18	18	18
I/O pins	33	33	33	50	66	66

FLASH SELECTION

The first decision is what FLASH memory to use in the circuit. This document will focus on the Am29F100 from AMD. This device has a selectable memory/interface size: 128K x 8 or 64K x 16. The 16-bit interface is chosen because the PIC17CXXX devices have 16-bit wide program memory. The address line A15 may need to be inverted depending on the PICmicro internal OTP memory size and the FLASH memory selected. The AMD device needs to access address locations 2AAAh and 5555h for program and erase operations. For PICmicro microcontrollers with 8K or less program memory, no inversion is necessary, but is required for

the 16K and larger devices. The address location 2AAAh in the FLASH memory is mapped on top of internal program memory, which takes precedence. Any access to 2AAAh will be to the internal OTP memory and not to the external FLASH memory. The inversion is transparent to the designer except that program or erase operations will use address locations AAAAh and D555h instead due to the inversion. The Technical Brief (TB027), Simplifying External Memory Connections of PIC17CXXX PICmicro microcontrollers, covers the memory mapping and circuit connection considerations in more detail. Figure 1 shows a block diagram for the external memory connections.


FIGURE 1: EXTERNAL MEMORY INTERFACE BLOCK DIAGRAM (x16 DEVICES)

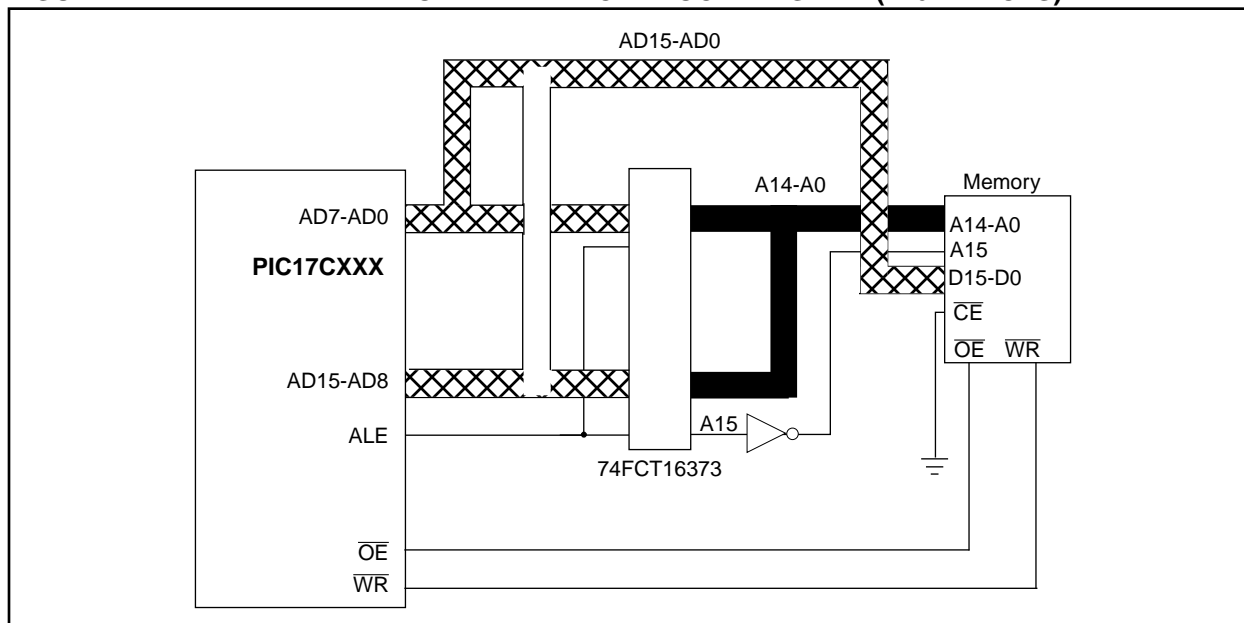

MICROCONTROLLER CONFIGURATION

The microcontroller has several operating modes. The first being **Microcontroller** mode, which uses only the internal OTP program memory. In this mode all I/O pins function as I/O pins. The second mode is **Microprocessor** mode, which uses only external memory. In this mode, 19 of the I/O pins function as the external memory interface (3 for control, 16 for address/data). The final mode is **Extended Microcontroller** mode, which uses internal OTP program memory. The remainder of 64K is external to the device. This mode must be used to program the external FLASH memory and the bootloader routine must reside in the OTP memory. Refer to the PIC17C7XX data sheet (DS30289) or the PIC17C4X data sheet (DS30412) for more information about processor modes. Figure 2 shows the memory map configuration for extended microcontroller mode for the PIC17C756A.

FIGURE 2: PIC17C756A IN EXTENDED MICROCONTROLLER MODE

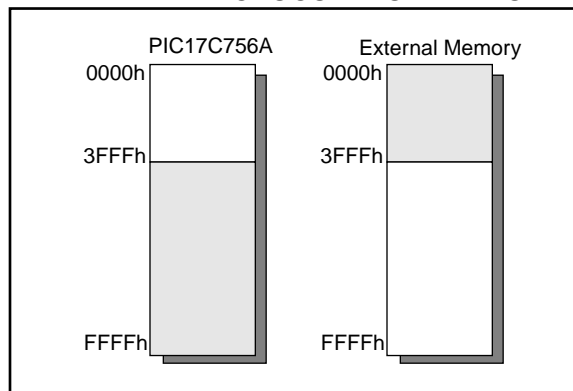

HEX FILE FORMAT

The HEX file to be programmed into program memory will be read into the microcontroller using one of its standard interface modules: USART, SPI, or I²C. The formats supported by the Microchip development tools are the Intel Hex Format (INHX8M), Intel Split Hex Format (INHX8S), and the Intel Hex 32 Format (INHX32). The format required by the PIC17CXXX devices is the INHX32 due to the 64K of address space. Please refer to Appendix A in the MPASM User's Guide (DS33014) for more information about HEX file formats. The INHX32 format supports 32-bit addresses using a linear address record. The basic format of the INHX32 hex file is:

:BBAAAATTHHHH...HHHHCC

Each data record begins with a 9 character prefix and always ends with a 2 character checksum. All records begin with a ':' regardless of the format. The individual elements are described below.

- **BB** - is a two digit hexadecimal byte count representing the number of data bytes that will appear on the line. Divide this number by two to get the number of words per line.
- **AAAA** - is a four digit hexadecimal address representing the starting address of the data record. Format is high byte first followed by low byte. The address is doubled because this format only supports 8-bits (to find the real PICmicro address, simply divide the value **AAAA** by 2).
- **TT** - is a two digit record type that will be '00' for data records, '01' for end of file records and '04' for extended address record.
- **HHHH** - is a four digit hexadecimal data word. Format is low byte followed by high byte. There will be **BB/2** data words following **TT**.
- **CC** - is a two digit hexadecimal checksum that is the two's complement of the sum of all the preceding bytes in the line record.

The HEX file is composed of ASCII characters 0 through 9 and A to F and the end of each line has a carriage return and linefeed. The downloader code in the PICmicro must convert the ASCII characters to binary numbers for use in programming.

PICmicro CODE

The code for the PIC17CXXX devices was written using the MPLAB-C17 C compiler. A demo version of the MPLAB-C17 C compiler is available off the Microchip website, www.microchip.com. This code uses USART2 on the PIC17C756A as the interface to the PC. In addition to USART2, two I/O pins are used to implement hardware handshaking with the PC host. Handshaking must be used because the program time of the FLASH memory prevents the PC from simply streaming the data down to the PICmicro microcontroller. The PICmicro microcontroller itself does not have enough RAM to buffer the incoming data while the FLASH is programming. Listing 1 shows the C code. Figure 3 shows a flowchart for the downloader code.

In this particular example, the hardware USART2 is used to download hex files from the PC host. Hardware handshaking is used to communicate with the PC. The function `DataRdyU2` properly asserts the handshake signals to the PC to receive one byte of data.

Two other functions not listed read in a byte (`Hex8in`) or a word (`Hex16in`) and return the binary value of the ASCII characters read. `Hex8in` reads two characters and converts them to an 8-bit value. `Hex16in` reads in 4 characters and converts them to binary. The format for `Hex16in` is high byte then low byte.

LISTING 1: HEX DOWNLOAD CODE WRITTEN FOR MPLAB™-C17

```
void EraseFlash(void)
{
    rom int *EFp;                // FLASH requires following sequence to
    unsigned int dataEF;          // initiate a write

    EFp = (rom int *)0xd555;      // Setup pointer to D555h
    *EFp = 0xaaaa;                // Write data AAAAh
    EFp = (rom int *)0xaaaa;
    *EFp = 0x5555;
    EFp = (rom int *)0xd555;
    *EFp = 0x8080;
    EFp = (rom int *)0xd555;
    *EFp = 0xaaaa;
    EFp = (rom int *)0xaaaa;
    *EFp = 0x5555;
    EFp = (rom int *)0xd555;
    *EFp = 0x1010;
    EFp = (rom int *)0x8000;
    do                            // Wait for FLASH to erase
    {
        dataEF = *EFp;
        if(dataEF & 0x0020)
            Nop();
        Nop();
    } while(!(dataEF&0x0080));
    return;
}

void ProgPreamble(void)
{
    rom int *PPp;                // FLASH requires a preamble before each
                                // word that is programmed

    PPp = (rom int *)0xd555;      // Setup pointer to D555h
    *PPp = 0xaaaa;                // Write data AAAAh
    PPp = (rom int *)0xaaaa;
    *PPp = 0x5555;
    PPp = (rom int *)0xd555;
    *PPp = 0xa0a0;
    return;
}

char DownloadHex(void)
{
    unsigned char ByteCount, RecType, Checksum, FChecksum;
    unsigned char DHi, Errors;
    unsigned char bytes;
    unsigned int AddrL, AddrH;
    unsigned int HexData;
    unsigned char temp;
    char str[5];
    rom int *DHP;

    EraseFlash();                // Erase FLASH
    AddrH = 0;                   // Make high address word 0
    while(1)                     //
    {                             // Wait for a :
        while(1)
        {
            while(!DataRdyU2());
            if(RCREG2 == ':')
                break;
        }
        Errors = 0;              // Preset errors to 0
        ByteCount = Hex8in();     // Read in ByteCount and store in Checksum
        Checksum = ByteCount;
        AddrL = Hex16in();        // Read in low word of address and add
        Checksum += (unsigned char)AddrL; // to Checksum
    }
}
```

```

Checksum += ((unsigned char)(AddrL>>8));
RecType = Hex8in(); // Read in RecordType and add to Checksum
Checksum += RecType;
if(RecType == 0x00) // Data record
{
    if(AddrH) // Assemble 16-bit word address
        DHp = (rom int *)((AddrL>>1)+0x8000); // from AddrH and AddrL
    else
        DHp = (rom int *)((AddrL>>1);
    bytes = ByteCount>>1; // get number of words in record
    for(DHi=0;DHi<bytes;DHi++) // loop for number of words
    {
        temp = Hex8in(); // Read in word of data and
        HexData = (unsigned int)Hex8in(); // add to Checksum
        Checksum += temp;
        Checksum += (unsigned char)HexData;
        HexData <= 8;
        HexData |= (unsigned int)temp;
        if(DHp > (rom int *)0x3fff) // If address in not in OTP
        { // then program
            while(1)
            {
                ProgPreamble(); // Program preamble
                *DHp = HexData; // write cycle
                while((HexData&0x0080) != (*DHp&0x0080)) // Wait for program cycle
                    Nop(); // to terminate
                if(*DHp == HexData) // Make sure data was programmed
                    break; // If not try to reprogram
            }
            DHp++; // Increment address pointer
        }
        FChecksum = Hex8in(); // Read in LineChecksum
        if(FChecksum != (~Checksum + 1)) // Compare to calculated
            Errors = 1; // If not equal, increment errors
    }
}
else if(RecType == 0x04) // Extended address record
{
    AddrH = Hex16in(); // Read in 16-bits of address
    Checksum += (unsigned char)AddrH; // and add to Checksum
    Checksum += ((unsigned char)(AddrH>>8));
    FChecksum = Hex8in(); // Read in Line Checksum
    if(FChecksum != (~Checksum + 1)) // Compare to calculated
        Errors = 1; // If not equal, increment errors
}
else if(RecType == 0x01) // End of file record
{
    FChecksum = Hex8in(); // Read in LineChecksum
    if(FChecksum != (~Checksum + 1)) // Compare to calculated
        Errors = 1; // If not equal, increment errors
    break;
}
}
return Errors; // Return number of errors
}

```

FIGURE 3: FLOWCHART


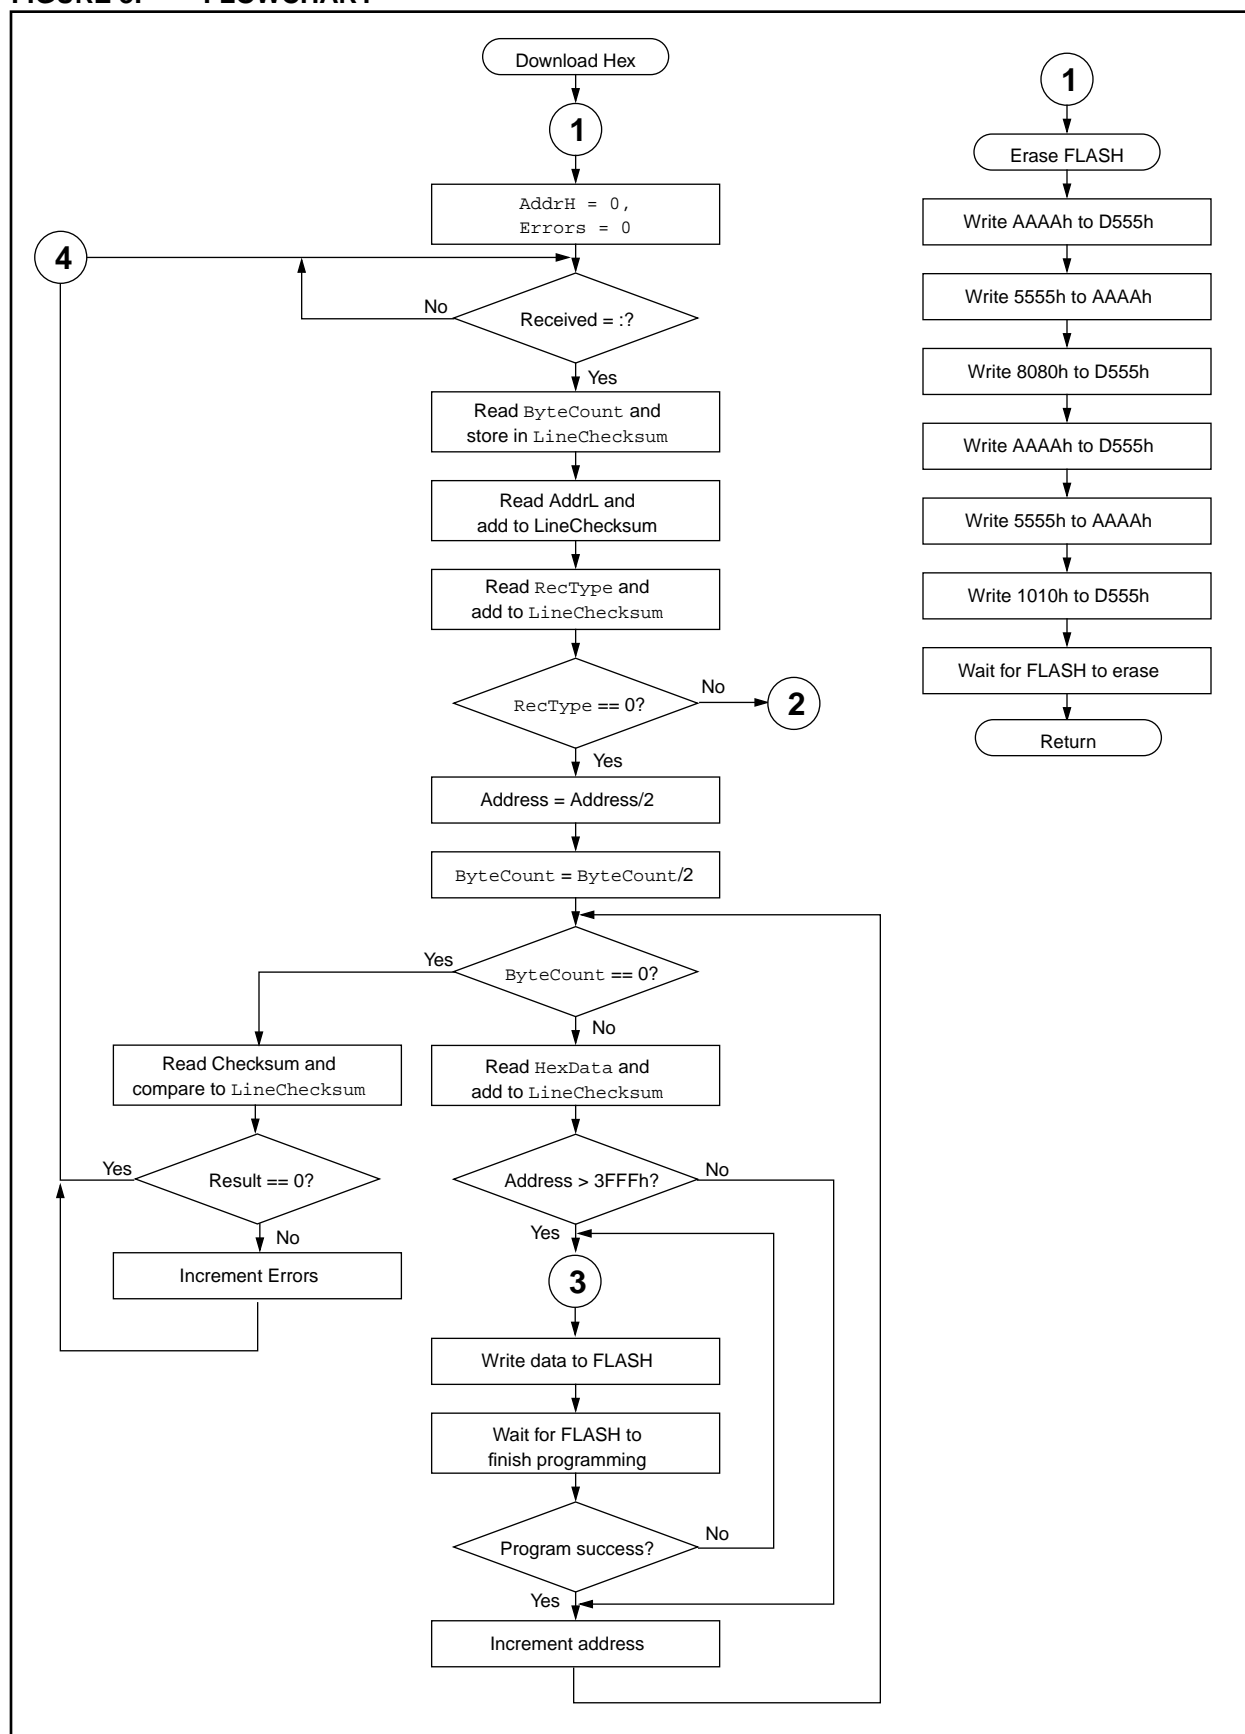


FIGURE 3 : FLOWCHART CONT'D



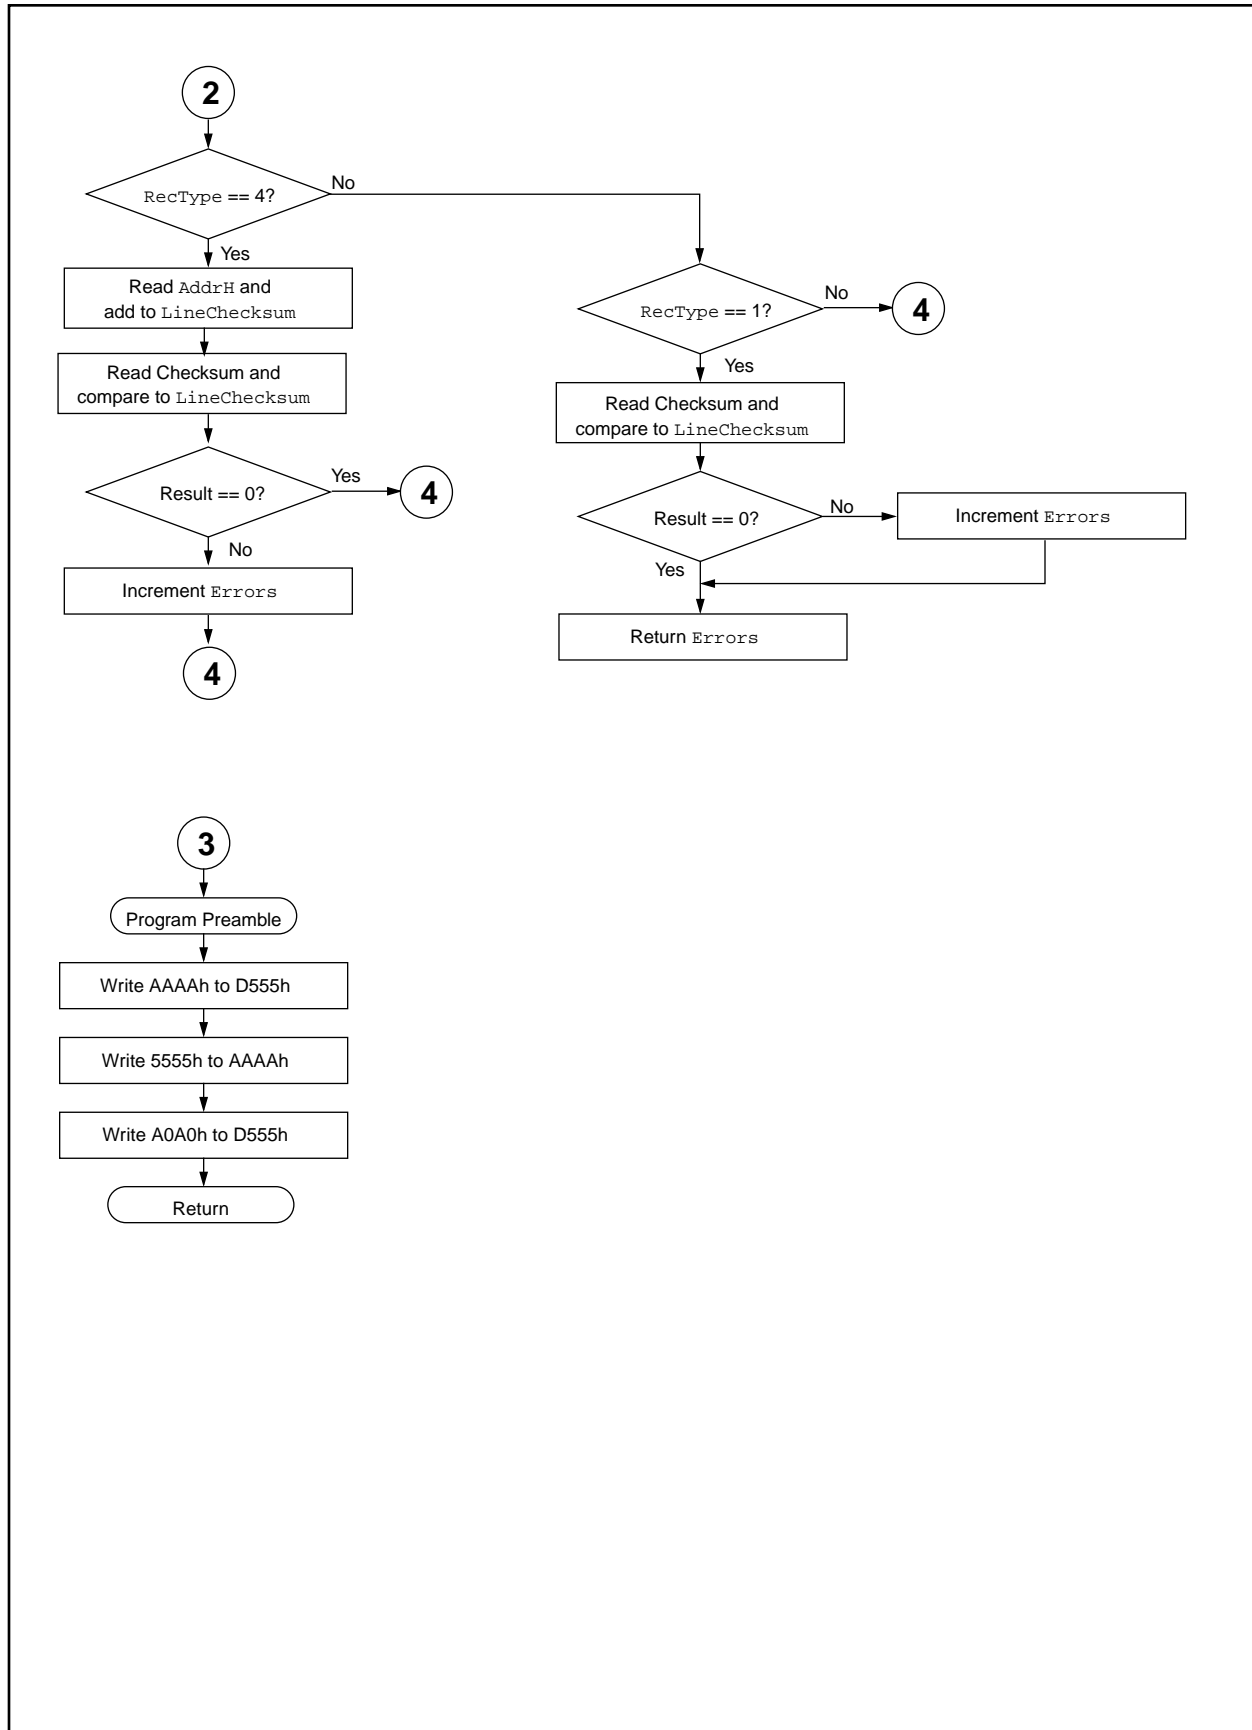

MICROCHIP

WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

Microchip Technology Inc.
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 602-786-7200 Fax: 602-786-7277
Technical Support: 602 786-7627
Web: <http://www.microchip.com>

Atlanta

Microchip Technology Inc.
500 Sugar Mill Road, Suite 200B
Atlanta, GA 30350
Tel: 770-640-0034 Fax: 770-640-0307

Boston

Microchip Technology Inc.
5 Mount Royal Avenue
Marlborough, MA 01752
Tel: 508-480-9990 Fax: 508-480-8575

Chicago

Microchip Technology Inc.
333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

Microchip Technology Inc.
14651 Dallas Parkway, Suite 816
Dallas, TX 75240-8809
Tel: 972-991-7177 Fax: 972-991-8588

Dayton

Microchip Technology Inc.
Two Prestige Place, Suite 150
Miamisburg, OH 45342
Tel: 937-291-1654 Fax: 937-291-9175

Detroit

Microchip Technology Inc.
42705 Grand River, Suite 201
Novi, MI 48375-1727
Tel: 248-374-1888 Fax: 248-374-2874

Los Angeles

Microchip Technology Inc.
18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 714-263-1888 Fax: 714-263-1338

New York

Microchip Technology Inc.
150 Motor Parkway, Suite 202
Hauppauge, NY 11788
Tel: 516-273-5305 Fax: 516-273-5335

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

AMERICAS (continued)

Toronto

Microchip Technology Inc.
5925 Airport Road, Suite 200
Mississauga, Ontario L4V 1W1, Canada
Tel: 905-405-6279 Fax: 905-405-6253

ASIA/PACIFIC

Hong Kong

Microchip Asia Pacific
RM 3801B, Tower Two
Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2-401-1200 Fax: 852-2-401-3431

India

Microchip Technology Inc.
India Liaison Office
No. 6, Legacy, Convent Road
Bangalore 560 025, India
Tel: 91-80-229-0061 Fax: 91-80-229-0062

Japan

Microchip Technology Intl. Inc.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa 222-0033 Japan
Tel: 81-45-471- 6166 Fax: 81-45-471-6122

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea
Tel: 82-2-554-7200 Fax: 82-2-558-5934

Shanghai

Microchip Technology
RM 406 Shanghai Golden Bridge Bldg.
2077 Yan'an Road West, Hong Qiao District
Shanghai, PRC 200335
Tel: 86-21-6275-5700 Fax: 86 21-6275-5060

ASIA/PACIFIC (continued)

Singapore

Microchip Technology Singapore Pte Ltd.
200 Middle Road
#07-02 Prime Centre
Singapore 188980
Tel: 65-334-8870 Fax: 65-334-8850

Taiwan, R.O.C

Microchip Technology Taiwan
10F-1C 207
Tung Hua North Road
Taipei, Taiwan, ROC
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

United Kingdom

Arizona Microchip Technology Ltd.
505 Eskdale Road
Winkers Triangle
Wokingham
Berkshire, England RG41 5TU
Tel: 44-1189-21-5858 Fax: 44-1189-21-5835

France

Arizona Microchip Technology SARL
Zone Industrielle de la Bonde
2 Rue du Buisson aux Fraises
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Arizona Microchip Technology GmbH
Gustav-Heinemann-Ring 125
D-81739 München, Germany
Tel: 49-89-627-144 0 Fax: 49-89-627-144-44

Italy

Arizona Microchip Technology SRL
Centro Direzionale Colleoni
Palazzo Taurus 1 V. Le Colleoni 1
20041 Agrate Brianza
Milan, Italy
Tel: 39-39-6899939 Fax: 39-39-6899883

9/29/98



Microchip received ISO 9001 Quality System certification for its worldwide headquarters, design, and wafer fabrication facilities in January, 1997. Our field-programmable PICmicro® 8-bit MCUs, Serial EEPROMs, related specialty memory products and development systems conform to the stringent quality standards of the International Standard Organization (ISO).

All rights reserved. © 1998 Microchip Technology Incorporated. Printed in the USA. 10/98 Printed on recycled paper.

Information contained in this publication regarding device applications and the like is intended for suggestion only and may be superseded by updates. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights. The Microchip logo and name are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All rights reserved. All other trademarks mentioned herein are the property of their respective companies.