

## Using HI-TECH C<sup>®</sup> and a Timer to Interface Mid-Range PIC<sup>®</sup> MCUs with UNI/O<sup>®</sup> Serial EEPROMs

*Author: Chris Parris  
Microchip Technology Inc.*

### INTRODUCTION

As embedded systems become smaller, a growing need exists to minimize I/O pin usage for communication between devices. Microchip has addressed this need by developing the UNI/O<sup>®</sup> bus, a low-cost, easy-to-implement solution requiring only a single I/O pin for bidirectional communication.

UNI/O serial EEPROMs can be used to enhance any application facing restrictions on available I/O. Such restrictions can potentially stem from connectors, board space, or from the master device itself.

The 11XXX family is the newest addition to Microchip Technology's broad serial EEPROM product line, and is compatible with the newly developed UNI/O bus.


The main features of 11XXX serial EEPROMs are:

- Single I/O Pin used for Communication
- EEPROM Densities from 1 Kb to 16 Kb
- Extremely Small Packages
- Bus Speed from 10 kHz up to 100 kHz
- Wide Voltage Range from 1.8V to 5.5V
- Low-Power Operation
- Wide Temperature Range from -40°C to +125°C
- Over 1,000,000 Erase/Write Cycles


This application note is part of a series that provide source code to help the user implement the protocol with minimal effort.

Figure 1 describes the hardware schematic for the interface between the Microchip 11XXX series of UNI/O serial EEPROMs and the PIC12F615 microcontroller, and Figure 2 shows the schematic for the PIC16F616. The schematics show the connections necessary between the microcontroller and the serial EEPROM as tested. The software was written assuming these connections. The single I/O connection between the microcontroller and the serial EEPROM includes a recommended pull-up resistor.

**FIGURE 1: CIRCUIT FOR PIC12F615 AND 11XXX SERIAL EEPROM**

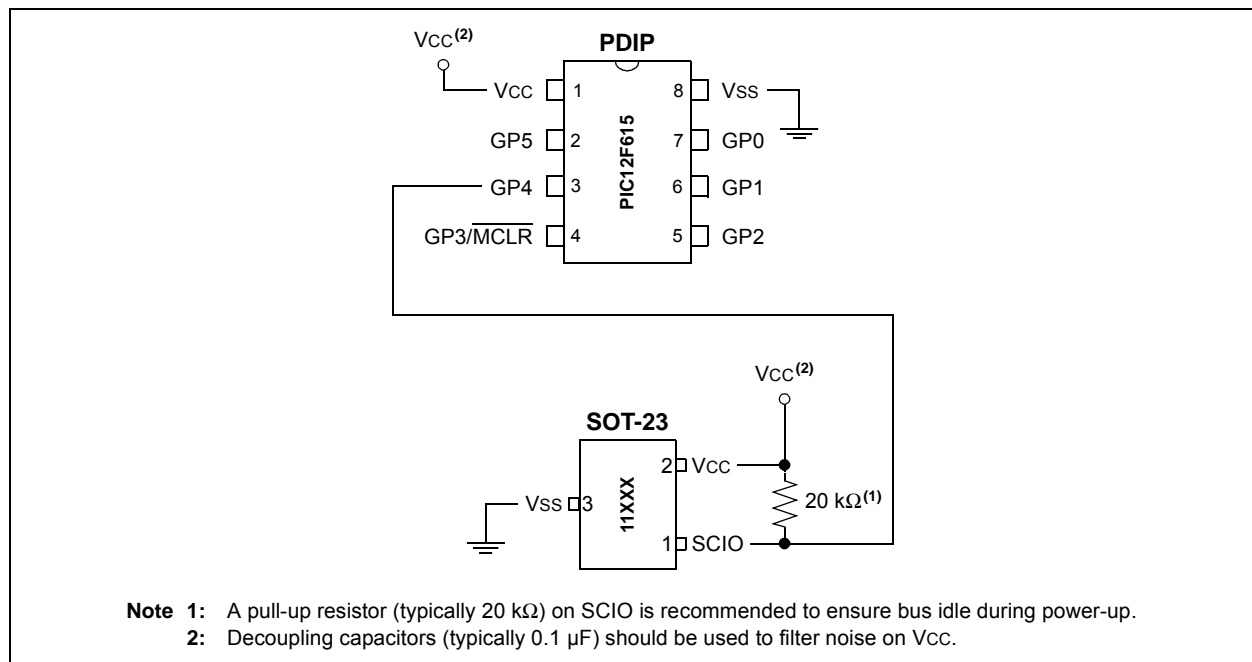

**FIGURE 2: CIRCUIT FOR PIC16F616 AND 11XXX SERIAL EEPROM**

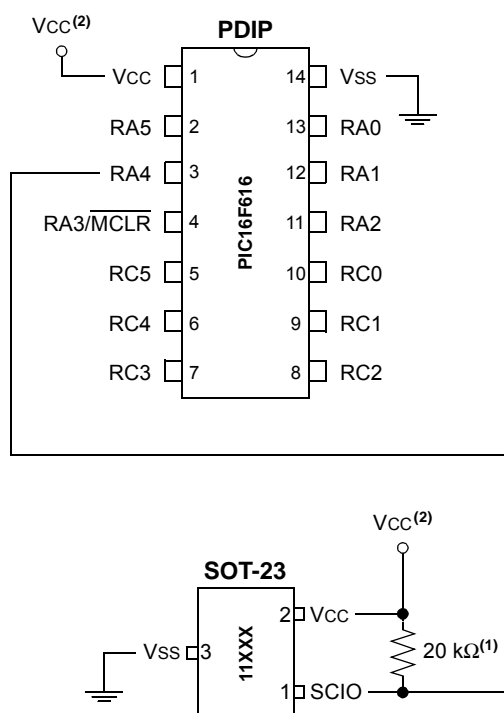

- Note 1:** A pull-up resistor (typically 20 kΩ) on SCIO is recommended to ensure bus idle during power-up.  
**Note 2:** Decoupling capacitors (typically 0.1 μF) should be used to filter noise on VCC.

## FIRMWARE DESCRIPTION

The purpose of the firmware is to show how to generate specific UNI/O bus transactions using a general I/O pin on the microcontroller. The focus is to provide the designer with a strong understanding of communication with the 11XXX serial EEPROMs, thus allowing for more complex programs to be written in the future. The firmware was written in C, compiled with HI-TECH C® PRO for the PIC10/12/16 MCU Family, and tested using the Microchip PICkit™ 2 Low Pin Count Demo Board. The code can easily be modified to use any I/O pin that is available.

No additional libraries are required with the provided code. Separate projects are provided for the PIC12 and PIC16. Within each project, the main program is organized into five sections:

- Initialization
- Write Enable
- Page Write
- WIP Polling
- Sequential Read

The program utilizes the WIP polling feature for detecting the completion of the write cycle after the page write operation. The read operation allows for verification that the data was properly written. No method of displaying the input data is provided, but an oscilloscope can be used.


The code was tested using the 11LC160 serial EEPROM. This device features 2K x 8 (16 Kbits) of memory and 16-byte pages. Oscilloscope screen shots are labeled for ease in reading. The data sheet versions of the waveforms are shown below the oscilloscope screen shots. The internal 8 MHz RC oscillator is used to clock the microcontroller. If a different clock is used, the code must be modified to generate the proper timings. During testing, a 10 kHz serial bus frequency was used. The code was tested with both the lite and pro versions of the HI-TECH C compiler; however, the pro version allows for faster serial bus frequencies to be achieved due to the inclusion of code optimization. All values represented in this application note are decimal values unless otherwise noted.

## INITIALIZATION

Before initiating communication with the 11XXX, the master device (MCU) must generate a low-to-high edge on SCIO to release the serial EEPROM from Power-on Reset (POR). Because bus idle is high, the MCU creates a high-low-high pulse on SCIO. Once the serial EEPROM has been released from POR, a standby pulse with a minimum timing of TSTBY is performed to place the serial EEPROM into Standby mode, as shown in Figure 3.

Note that once a command has successfully executed – indicated by the reception of a Slave Acknowledge (SAK) following the No Master Acknowledge (NoMAK) – the serial EEPROM enters Standby mode immediately and a standby pulse is not necessary. In this case, only the Start Header Setup time (Tss) must be observed before the MCU may initiate another command to the same device.

**FIGURE 3: STANDBY PULSE**

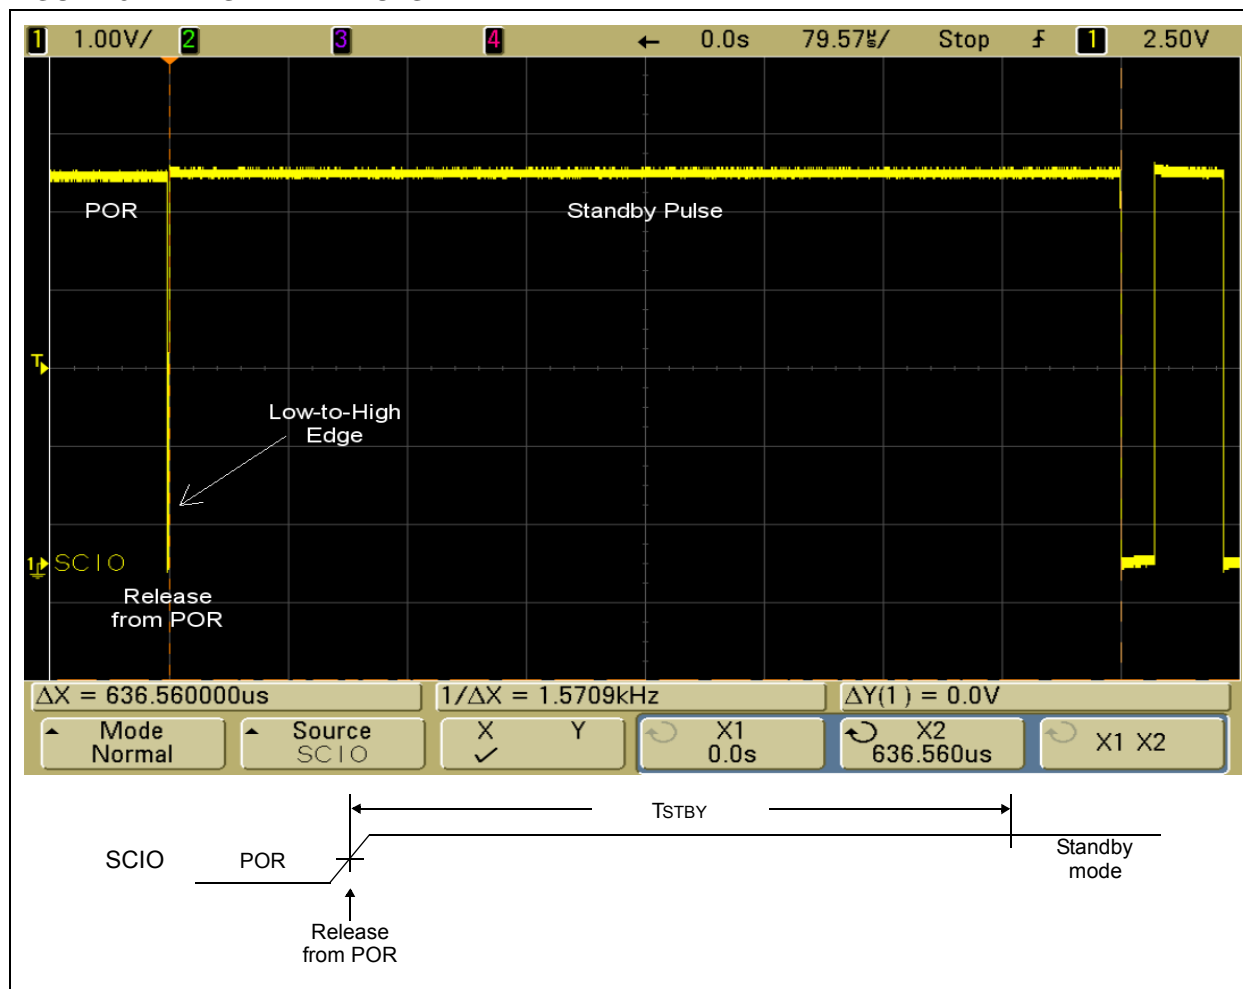

## WRITE ENABLE

Before a write operation to the array or the STATUS register can occur, the Write Enable Latch (WEL) must be set. This is done by issuing a Write Enable (WREN) instruction.


The WEL can be cleared by issuing a Write Disable (WRDI) instruction. It is also cleared upon termination of a write cycle to either the array or STATUS register, and upon POR.

The write enable operation has been broken down into the following components: the start header, which is followed by the device address and the command byte.

## Start Header and Device Address

To issue a WREN instruction, the MCU transmits the start header. This consists of a low pulse ( $T_{HDR}$ ), followed by '01010101', and a Master Acknowledge (MAK), followed by a NoSAK. Next, the MCU transmits the device address ('10100000') and another MAK. The serial EEPROM then responds with a SAK if the start header and device address were received correctly. Figure 4 shows the details of the start header and device address.

**FIGURE 4: START HEADER AND DEVICE ADDRESS**

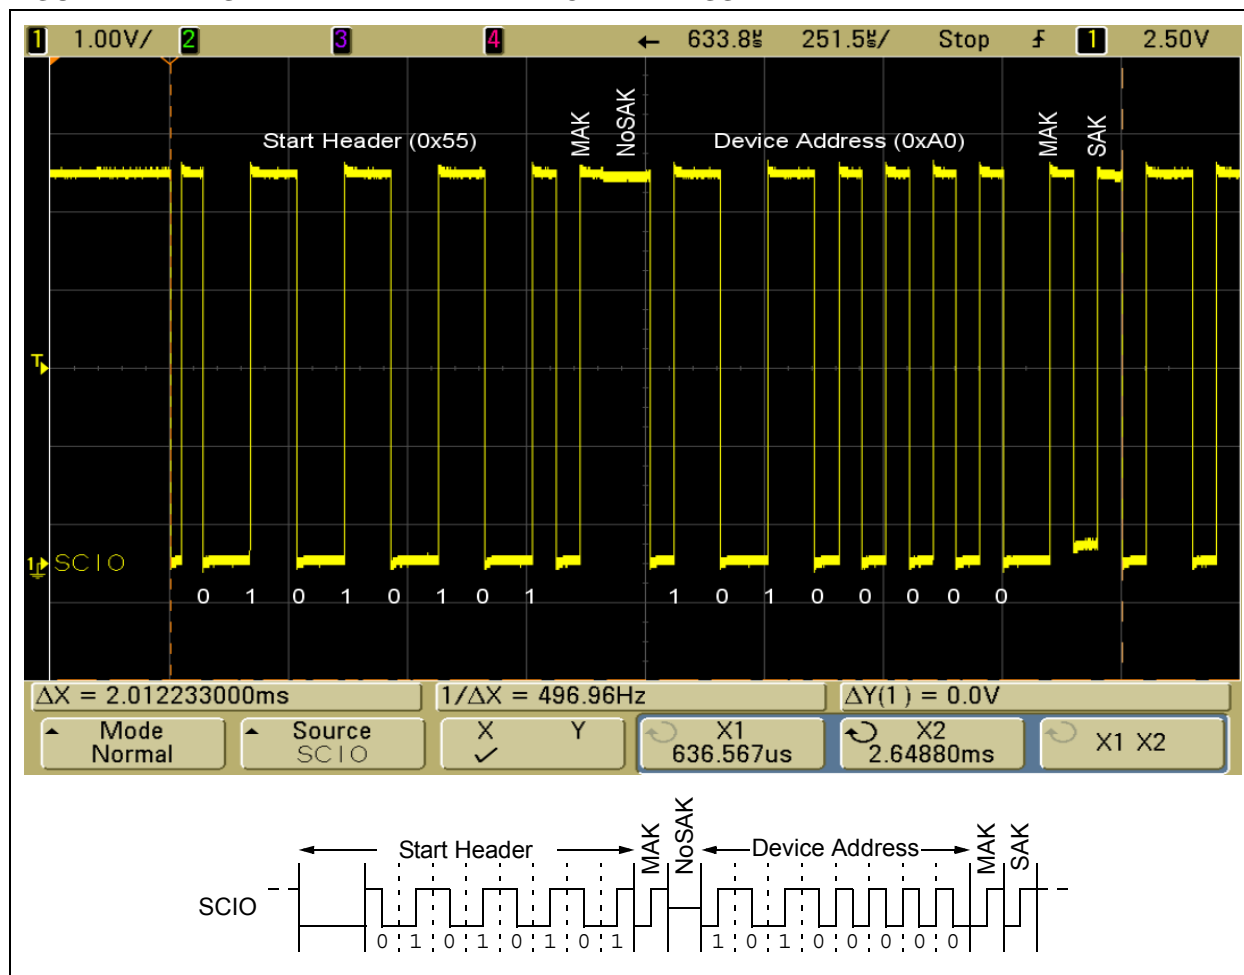


## Write Enable (WREN) Command Byte

Once the SAK is received following the device address, the MCU sends the WREN command byte ('10010110' or 0x96) and performs a final Acknowledge sequence. During this last sequence, the MCU sends a NoMAK to signal the end of the operation. Once again, the serial EEPROM responds with a SAK, indicating it received the byte successfully.

Figure 5 shows an example of the WREN command byte.

**FIGURE 5: WRITE ENABLE COMMAND**

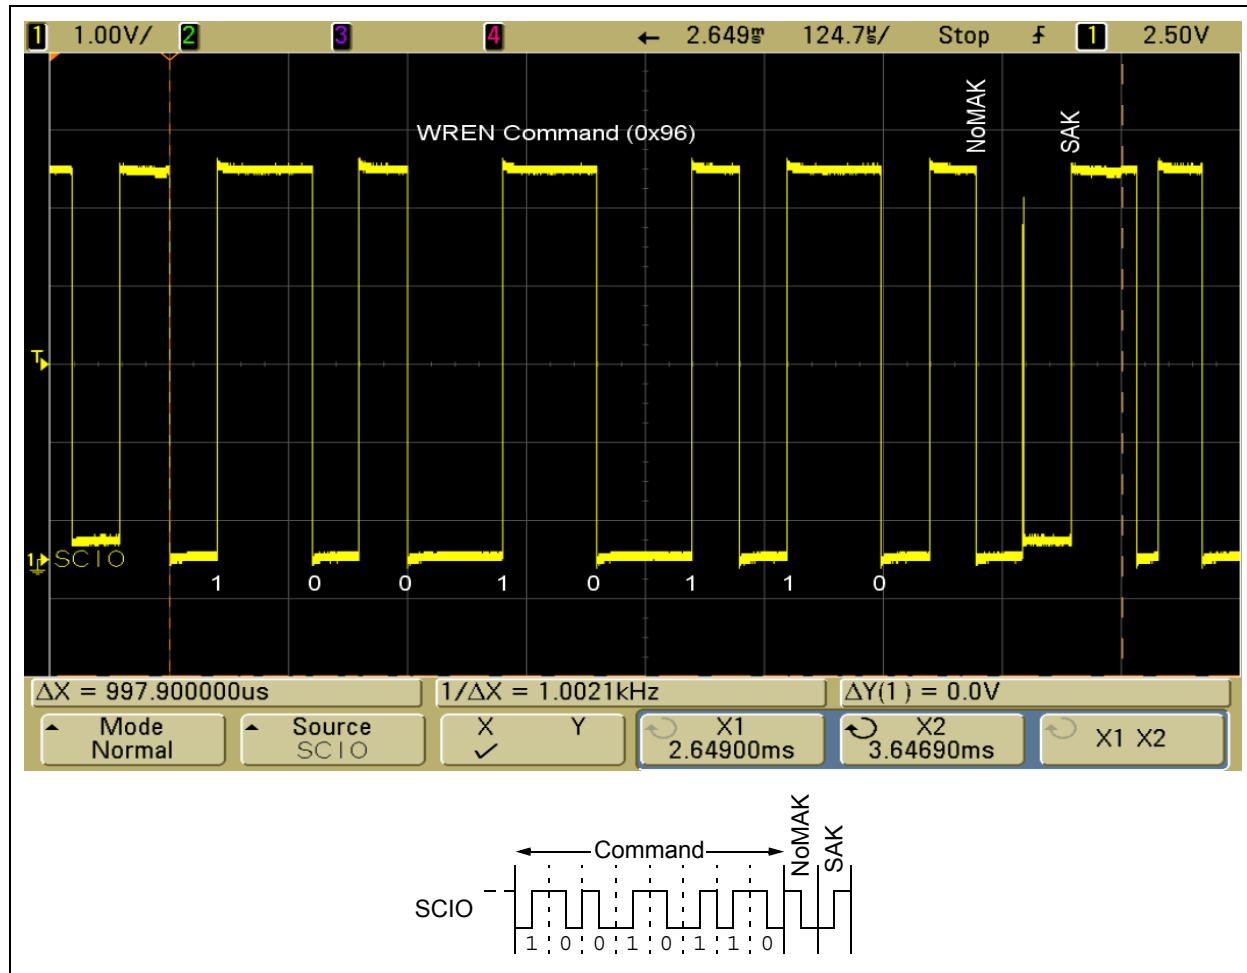

## PAGE WRITE

Once the `WREN` instruction has been performed, a page write operation can be executed to write data to the array. The serial EEPROM features a 16-byte page, so up to 16 bytes of data can be written within a single operation.

The page write operation consists of the following components: the write command, followed by the word address and the data bytes. Note that the start header and device address are not illustrated in this section but are still required to initiate the operation.


Before beginning the `WRITE` instruction, a period of  $T_{ss}$  must be observed following the `WREN` operation. This period can be used in place of the standby pulse after a command has been executed successfully when addressing the same slave device. After the  $T_{ss}$  period, the start header and device address are transmitted as described on page 5.

## Write Command and Word Address

After the start header and device address have been sent, the MCU transmits the write command ('01101100' or 0x6C) and the word address. The serial EEPROM uses a 16-bit word address to access the array, so two bytes must be transmitted for the entire word address, with the Most Significant Byte (MSB) sent first. After every byte, the MCU transmits a MAK and the serial EEPROM responds with a SAK.

Figure 6 shows an example of the write command and the word address.

**FIGURE 6: WRITE COMMAND AND WORD ADDRESS**

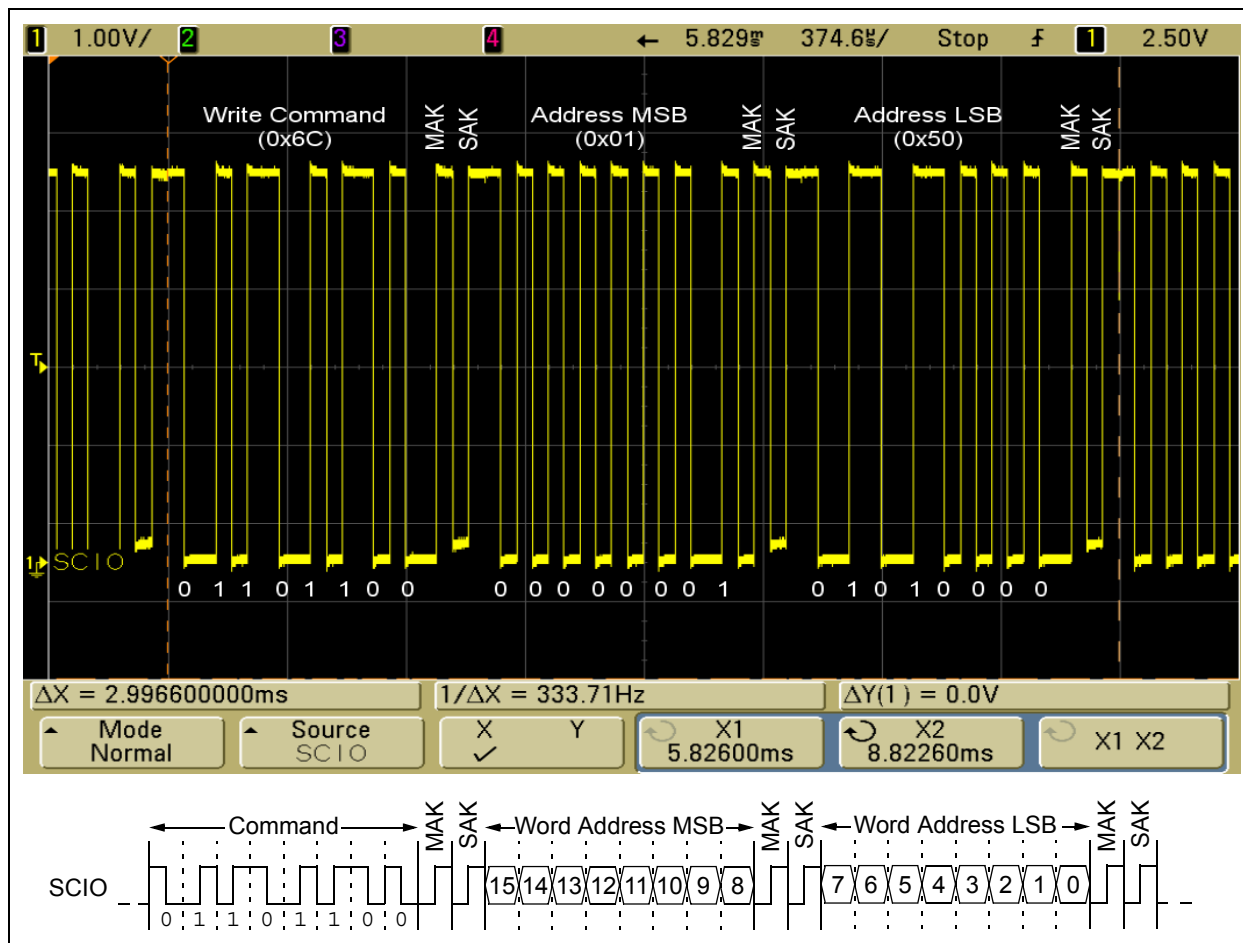


Data Bytes

Once the word address has been transmitted and the last SAK has been received, the data bytes can be sent. Up to 16 bytes of data can be sent within a single operation. After each byte is transmitted, the MCU sends a MAK and the serial EEPROM responds with a SAK. If at any point a NoSAK is received, this indicates an error occurred and the operation must be restarted, beginning with a standby pulse.

Once all data bytes have been sent, the MCU terminates the command by generating a NoMAK in place of the MAK, and the serial EEPROM again responds with a SAK. This will also initiate the internal write cycle (T<sub>wc</sub>).

Figure 7 shows the final two data bytes sent by the MCU, as well as the NoMAK and SAK.

FIGURE 7: WRITE COMMAND FINAL TWO DATA BYTES

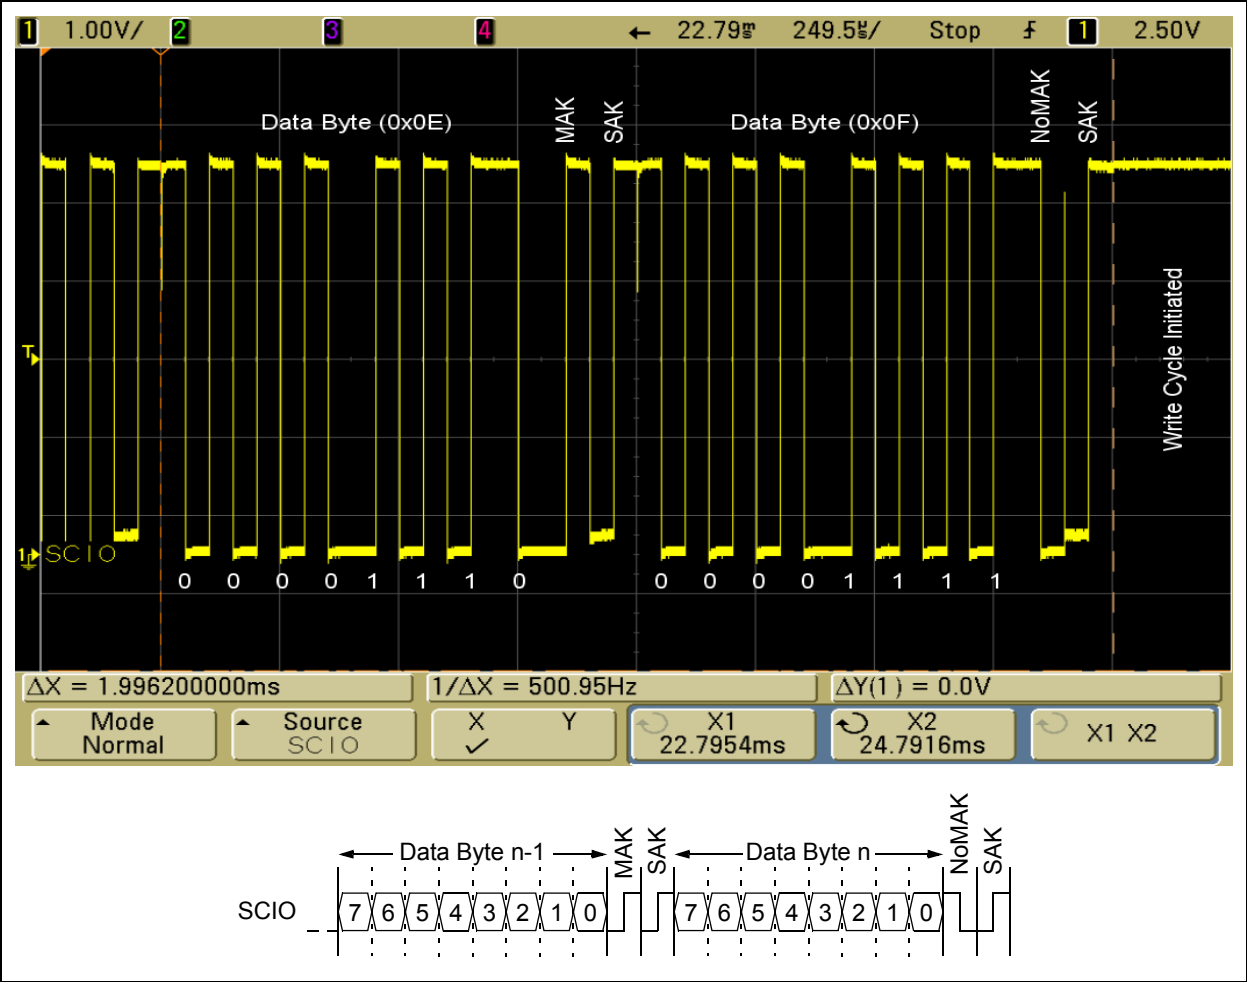



## WRITE-IN-PROCESS POLLING


After an array or STATUS register `WRITE` instruction is executed, the MCU must observe a write cycle time (TWC). Write cycle time is a maximum, so the actual time required is typically less. Therefore, to transfer data as efficiently as possible, using the Write-In-Process (WIP) polling feature is highly recommended. Because the STATUS register can be read during a write cycle, the WIP bit can be continuously monitored to determine the completion of the write cycle.

## Write-In-Process Polling Routine

The process of WIP polling consists of the MCU sending a start header and device address after observing the Tss period. The MCU follows this by sending the Read Status Register (RDSR) command ('00000101' or 0x05). After sending the subsequent SAK, the serial EEPROM transmits the STATUS register. At this point, the STATUS register can be requested again by sending a MAK. The WEL and WIP values sent are updated dynamically, so the MCU can continuously check the STATUS register. Sending a NoMAK terminates the command.

Figure 8 shows an example of WIP polling to check if a write operation has finished. In this example, the WIP bit is set ('1'), which indicates that the write cycle has not yet completed.

**FIGURE 8: WIP POLLING ROUTINE (SHOWING WRITE-IN-PROCESS)**

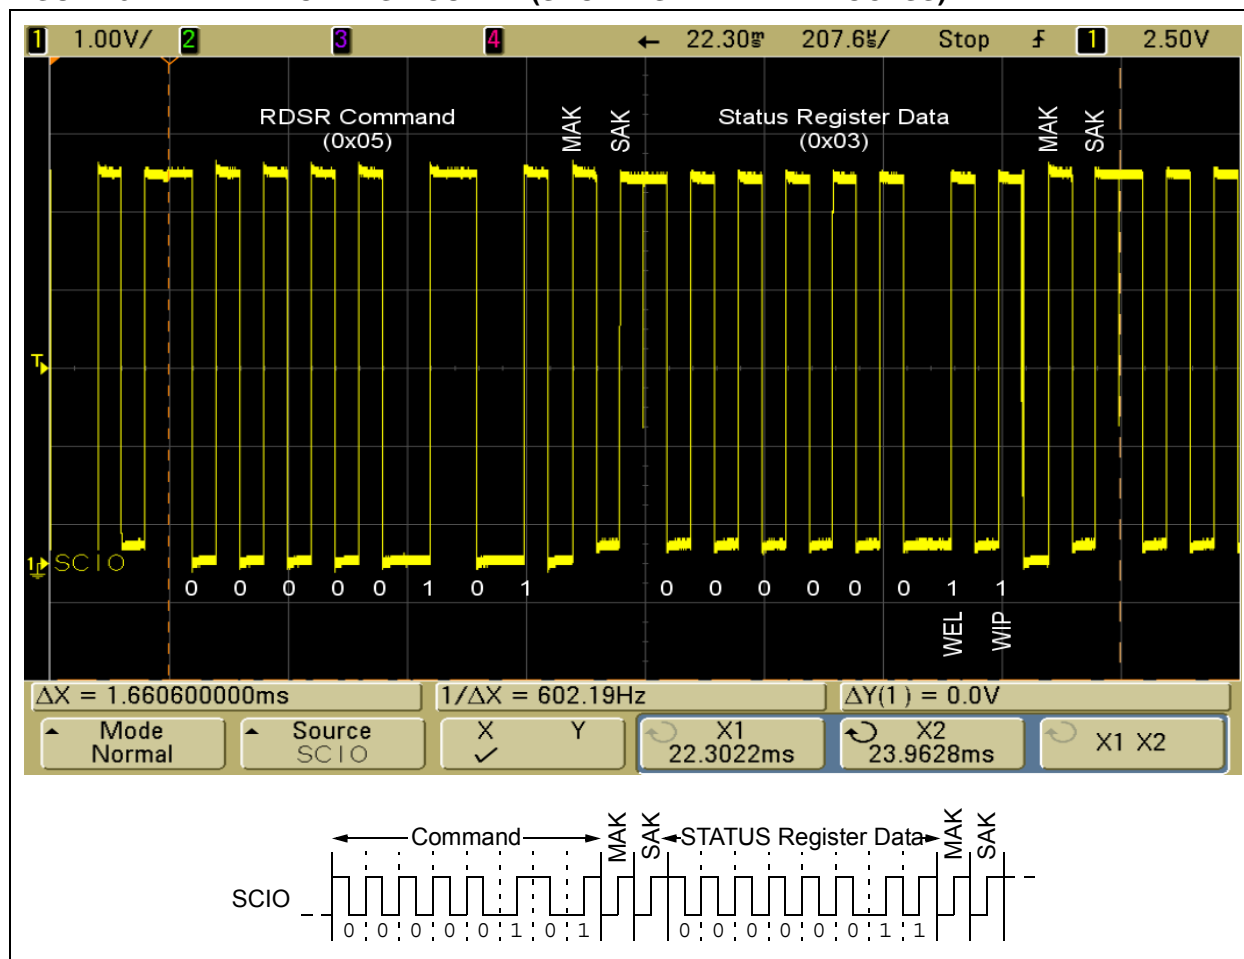




## SEQUENTIAL READ

The serial EEPROM allows data to be read from the array in a random access manner. Reading data from the array is very similar to the write operation, except that the read is not limited to a single page. In order to read from the array, the start header and device address must first be sent after observing the Tss period. The read command byte and word address bytes are transmitted next. The MCU generates a MAK after every byte, and the serial EEPROM responds with a SAK if no errors occurred.

## Command and Word Address for Read

Figure 10 shows an example of the read command ('00000011' or 0x03) followed by the word address.

**FIGURE 10: READ – COMMAND BYTE AND WORD ADDRESS**

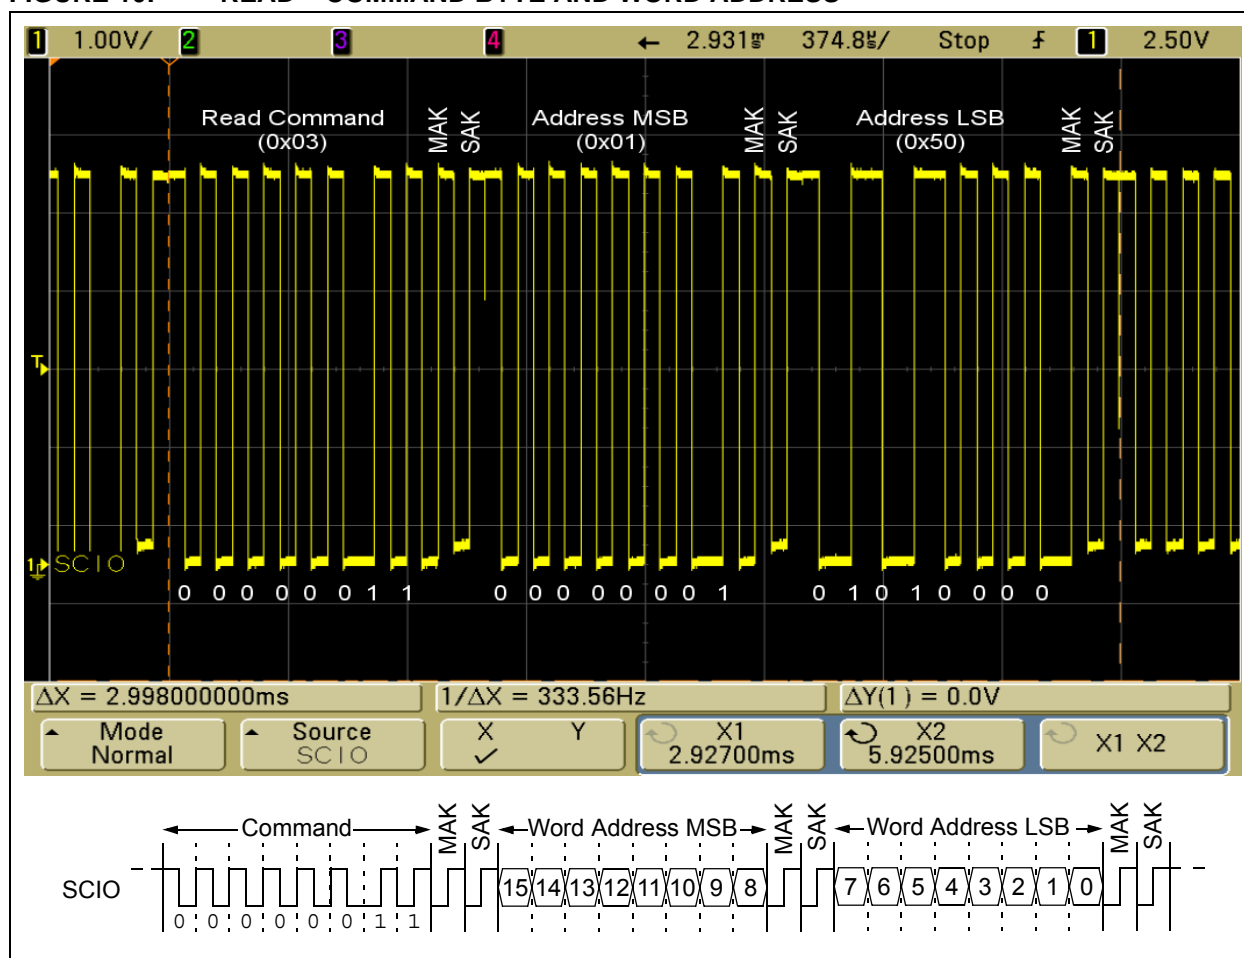


Reading Data Back

After the read command and word address have been sent and acknowledged, the serial EEPROM sends the first data byte from the array, starting at the address specified. In order to continue the read, the MCU must send a MAK after each data byte, with the serial EEPROM responding with a SAK if there are no errors. After each data byte has been sent, the serial EEPROM automatically increments the internal word address to output the next data byte.

The read operation is not limited to a single page, so the entire array can be read within a single operation if the MCU continues to request data. At the end of the array, the internal word address is automatically reset back to 0x000. A NoMAK terminates the operation.

Figure 11 shows the MCU reading the final two bytes of data. The MCU sends a NoMAK after the last byte to indicate that no more data is requested and to terminate the command.

FIGURE 11: READ – FINAL TWO DATA BYTES

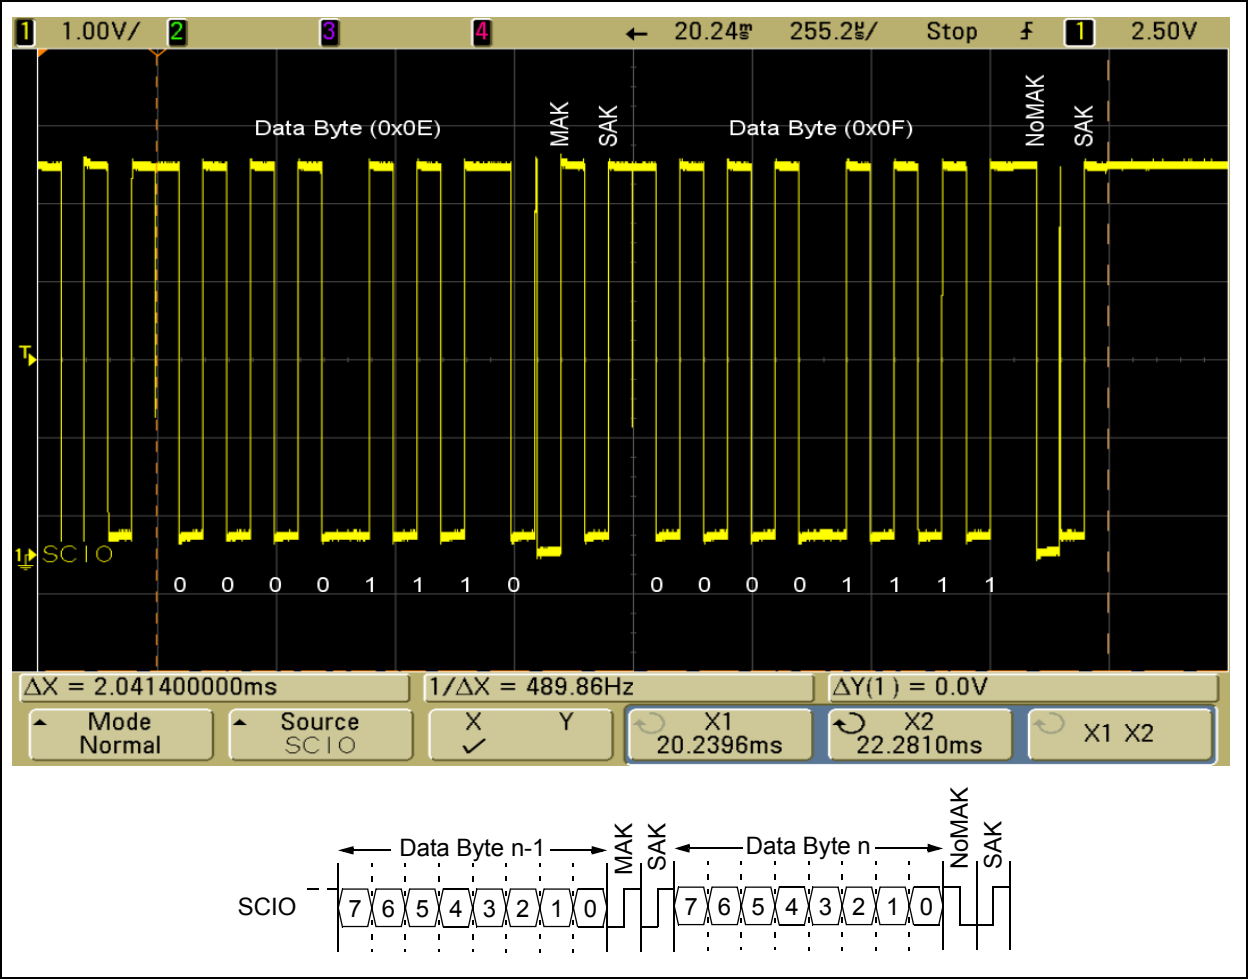

## CONCLUSION

This application note provides examples of the basic commands for communicating with the UNI/O family of serial EEPROMs. These functions are designed to be used in an end application with very little modification. The code generated for this application note was tested using the PICkit™ 2 Low Pin Count Demo Board with the connections shown in Figure 1 and Figure 2.

# AN1251

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, rfPIC, SmartShunt and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, In-Circuit Serial Programming, ICSP, ICEPIC, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, PICkit, PICDEM, PICDEM.net, PICtail, PIC<sup>32</sup> logo, PowerCal, PowerInfo, PowerMate, PowerTool, REAL ICE, rfLAB, Select Mode, Total Endurance, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2009, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949:2002 ==**

*Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



---

## WORLDWIDE SALES AND SERVICE

---

### AMERICAS

#### Corporate Office

2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://support.microchip.com>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

#### Kokomo

Kokomo, IN  
Tel: 765-864-8360  
Fax: 765-864-8387

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### Santa Clara

Santa Clara, CA  
Tel: 408-961-6444  
Fax: 408-961-6445

#### Toronto

Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

#### Asia Pacific Office

Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2401-1200  
Fax: 852-2401-3431

#### Australia - Sydney

Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

#### China - Beijing

Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

#### China - Chengdu

Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

#### China - Hong Kong SAR

Tel: 852-2401-1200  
Fax: 852-2401-3431

#### China - Nanjing

Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

#### China - Qingdao

Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

#### China - Shanghai

Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

#### China - Shenyang

Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

#### China - Shenzhen

Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

#### China - Wuhan

Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

#### China - Xiamen

Tel: 86-592-2388138  
Fax: 86-592-2388130

#### China - Xian

Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

#### China - Zhuhai

Tel: 86-756-3210040  
Fax: 86-756-3210049

### ASIA/PACIFIC

#### India - Bangalore

Tel: 91-80-3090-4444  
Fax: 91-80-3090-4080

#### India - New Delhi

Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

#### India - Pune

Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

#### Japan - Yokohama

Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

#### Korea - Daegu

Tel: 82-53-744-4301  
Fax: 82-53-744-4302

#### Korea - Seoul

Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

#### Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

#### Malaysia - Penang

Tel: 60-4-227-8870  
Fax: 60-4-227-4068

#### Philippines - Manila

Tel: 63-2-634-9065  
Fax: 63-2-634-9069

#### Singapore

Tel: 65-6334-8870  
Fax: 65-6334-8850

#### Taiwan - Hsin Chu

Tel: 886-3-572-9526  
Fax: 886-3-572-6459

#### Taiwan - Kaohsiung

Tel: 886-7-536-4818  
Fax: 886-7-536-4803

#### Taiwan - Taipei

Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

#### Thailand - Bangkok

Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

#### Austria - Wels

Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

#### Denmark - Copenhagen

Tel: 45-4450-2828  
Fax: 45-4485-2829

#### France - Paris

Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

#### Germany - Munich

Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

#### Italy - Milan

Tel: 39-0331-742611  
Fax: 39-0331-466781

#### Netherlands - Drunen

Tel: 31-416-690399  
Fax: 31-416-690340

#### Spain - Madrid

Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

#### UK - Wokingham

Tel: 44-118-921-5869  
Fax: 44-118-921-5820