



PIC24 Microcontroller Family

Performance, Low Power, Advanced Peripherals

PIC24H High Performance
PIC24F Low Power

Graphics Controller

12-bit ADC

nanoWatt XLP

High Performance DMA

CAN

USB-OTG

High-Temperature

MPLAB IDE
Common Development Platform

32-bit PIC32
dsPIC33
dsPIC30
PIC24H
PIC24F
PIC18
PIC16
PIC12
PIC10

8-bit
16-bit
32-bit

Functionality
Performance

The top challenges facing today's embedded system designer are attaining product specification and performance goals, achieving on-time market launch and meeting cost goals.

Microchip's PIC24 16-bit Microcontroller Families deliver the performance, peripherals, software and hardware development tools and production support to reach these objectives.

Broad and Scalable Portfolio

- Two 16-bit PIC24 families
 - PIC24F, low power, 16 MIPS, mid-range performance
 - PIC24H, highest performance 16-bit MCU at 40 MIPS
- 4 to 256 Kbytes of Flash program memory
- 0.5 to 96 Kbytes of RAM
- 14- to 100-pin package options

Real-Time Embedded Control

The PIC24 architecture was designed to meet the demanding needs of real-time control.


- Fast response to real-time events
 - Quick interrupt response, only 5 cycles
- Single-cycle bit manipulation
- Single-cycle instruction execution
- Single-cycle hardware multiply
- Optimized architecture for C Code

System Robustness and Management Features

- Flexible high-speed and low-power integrated oscillators with PLL eliminates need for external crystal
- Power-on Reset and fail-safe clock monitor
- nanoWatt XLP technology power management
- On-chip Low-Dropout Voltage Regulator (LDO)

nanoWatt XLP eXtreme Low Power

Products with Microchip's nanoWatt XLP Technology offer the industry's lowest Sleep currents, adding years to the life of today's low power and battery operated applications.

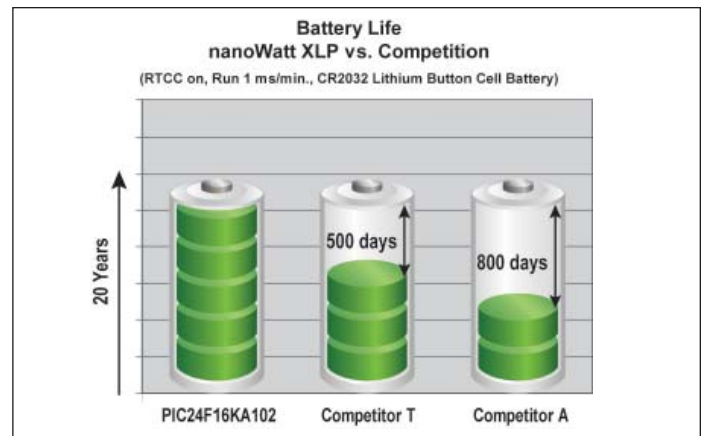


What's New!


- Graphics controller with graphics acceleration and Color Look-Up Table to drive a color display
- nanoWatt XLP technology with Sleep currents as low as 20 nA
- USB-OTG peripheral available on 28- to 100-pin products
- Extended temperature & high-temperature (140°C) products
- Implement mTouch™ capacitive touch sense keypads

Peripherals, Memory and Analog

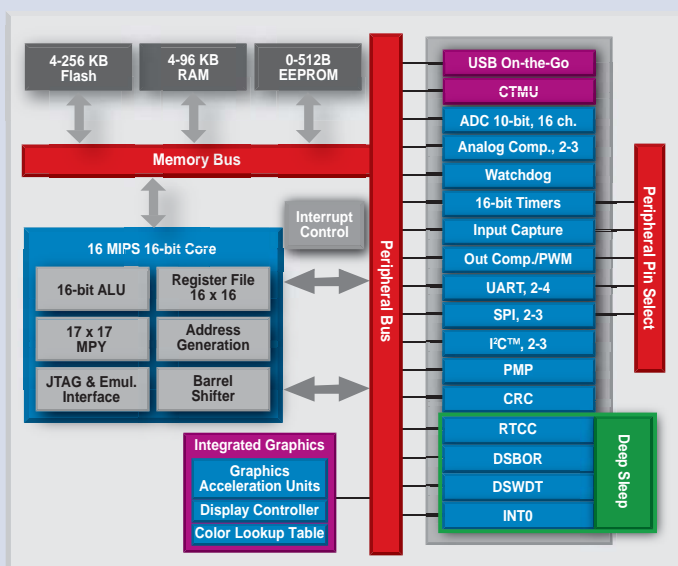

PIC24F Block Diagram

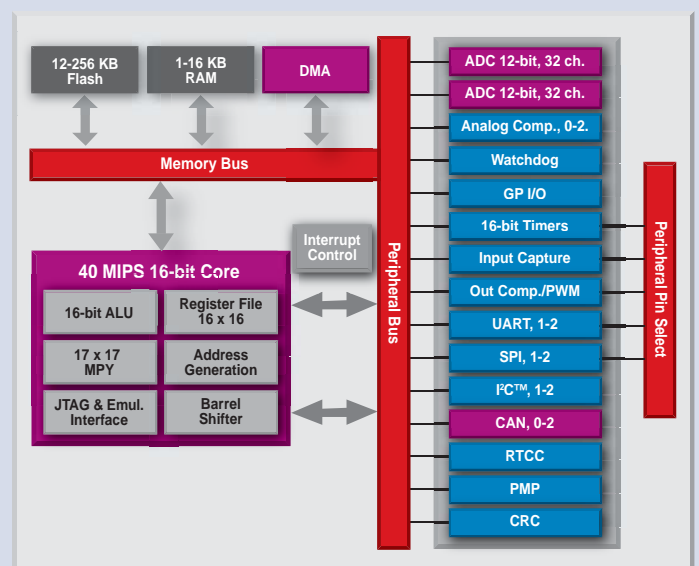

PIC24H Block Diagram



PIC24 16-bit Microcontrollers

| Family | Pins | Flash Memory Kbytes | SRAM Kbytes | 16-bit Timers Input Capture Output Compare | Analog | Communications Serial I/O | Additional Features |
|--|--------|---------------------|-------------|--|--|--|---|
| PIC24F Family – 16 MIPS, Lowest Cost, Lowest Power, General Purpose | | | | | | | |
|  PIC24F K Families | 14-44 | 4-32 | 0.5-2 | 3-5 Timers 1-3 IC 1-3 OC | 10-bit ADC (500 ksp/s) or 10/12-bit ADC (200/100 ksp/s), 7-16 ch., 2 comparators | UART w/IrDA® (2), SPI (1/2), I²C™ (1/2) | EEPROM, CTMU, Real-Time Clock Calendar (RTCC), Deep Sleep (DS) |
|  PIC24F G Families | 28-100 | 16-256 | 4-96 | 5 Timers 5-9 IC 5-9 OC | 10-bit ADC (500 ksp/s), 9-24 ch., 2/3 comparators, CTMU (0/1) | UART w/IrDA (2/4), SPI (2/3), I²C (2/3), USB-OTG | Peripheral Pin Select (PPS), Parallel Master Port (PMP), Real-Time Clock Calendar (RTCC), CRC, Deep Sleep (DS), JTAG |
| PIC24F D Families | 64-100 | 128-256 | 24-96 | 5 Timers 9 IC 9 OC | 10-bit ADC (500 ksp/s), 16-24 ch., 3 comparators, CTMU | UART w/IrDA (4), SPI (3), I²C (3), USB-OTG | Graphics Display Controller Peripheral Pin Select (PPS), Parallel Master Port (PMP), Real-Time Clock Calendar (RTCC), CRC, JTAG |
| PIC24H Family – 40 MIPS, Highest Performance, General Purpose | | | | | | | |
| PIC24H GP Families | 18-100 | 12-256 | 1-16 | 3-9 Timers 4-8 IC 2-8 OC | User selectable 12-bit ADC (500 ksp/s) or 10-bit ADC (1.1 Msp/s), 8-32 ch., comparators (0/2) | UART w/IrDA (1-2), SPI (1-2), I²C (1-2), CAN (0-2) | 8 ch. DMA, Peripheral Pin Select (PPS), Parallel Master Port (PMP), Real-Time Clock Calendar (RTCC), CRC, JTAG, Extended Temperature and High Temperature (140°C) Options |

PIC24 Family Features

| Memory | Key Features |
|--|--|
| Flash | Up to 256 KB self-programmable Flash with security |
| RAM | Up to 96 KB static RAM |
| EEPROM | Up to 512 bytes of EEPROM on PIC24F K families |
| DMA | Up to 8 channels between internal peripherals and up to 2 KB dual port RAM |
| I/O Interface | Key Features |
| Graphics Controller | Graphics Display Controller that include acceleration units, a Color Look-Up Table, and a direct interface to monochrome, color STN, TFT and OLED LCDs |
| PMP | Parallel I/O module supporting interface to external peripherals, memory and graphic displays |
| PPS | Peripheral Pin Select maps user selected peripherals to I/O pins |
| Communications | Key Features |
| USB-OTG | USB Standard now available and targeted for embedded control with application notes supporting Embedded Host, Peripheral and OTG |
| UART | Asynchronous channel supporting LIN, IrDA®, RS-232, RS-485 with 4-deep FIFO buffer or DMA |
| SPI | High-speed synchronous channel including 8-deep FIFO buffer or DMA |
| I²C™ | Support Multi-Master/Slave mode with 7-bit/10-bit addressing |
| CAN with buffer, filters | Automotive/Industrial standard, includes 8 transmit and 32 receive buffers |
| CRC | Programmable Cyclic Redundancy Check peripheral |
| Timers/Control | Key Features |
| 16-bit timers, cascadable to 32-bit | Cascadable to 32-bit, up/down, with multiple clock sources including a low-power 32 kHz oscillator, trigger for A/D conversion |
| Input Capture (IC) | The highly configurable Input Capture, Output Compare and PWM modules are easily configured with the Timer modules to generate waveforms and monitor external events |
| Output Compare (OC) | |
| Pulse Width Modulation (PWM) | |
| Watchdog Timer (WDT) | On-chip low-power RC oscillator, post-scaler for wide range of time-out values |
| Real-Time Clock Calendar (RTCC) | Hardware module provides 100-year calendar, clock and alarm functions |
| Analog | Key Features |
| Charge Time Measurement Unit (CTMU) | A constant current source coupled with the ADC to provide the ability to measure capacitance or time with ns resolution. CTMU makes it easy to implement a capacitive touch sense keypad |
| 10/12-bit A/D Converter | Up to 32 channels (1 Msp/s) on PIC24H and up to 16 channels (200/100 ksp/s) on the PIC24F |
| 10-bit A/D Converter | Up to 24 channels on PIC24F |
| Comparators | With on-chip programmable reference voltage |
| Integrated Voltage Regulator with Power-on Reset and Brown-out Reset | Power-on Reset and Brown-out Reset provide stable system operation |

Accelerate Time-to-Market with Training, Software Libraries and Development Tools

Training

Expand your knowledge with Microchip's on-line web seminars and hands-on courses at our worldwide Regional Training Centers (RTCs). Our seminars and training classes are designed to fit your schedule and offer an overview of many product, development tool and application topics. Visit www.microchip.com/training for class content and schedules.

Class Examples

HIF 2131: Designing with Microchip's Graphics Library

This hands-on class teaches students to harness the power of Microchip's Graphics Library to decrease the development time of sophisticated human interfaces using graphical LCD display technologies with various input devices. Students will use the Microchip Graphics Library, the Explorer 16 development board and the Graphics PICtail™ Plus Daughter board to implement a real life application.

COM 3202: Designing a USB Embedded Host Application

The USB On-The-Go (OTG) Supplement was designed to allow embedded devices with substantially less resources than a PC to become hosts to other USB devices. Attendees will learn about USB hosting options, using a FAT file system library to manipulate files on a thumb drive, a process for developing a generic (custom class) driver and an application that acts as a host to a simple USB device.

PIC24 Resource Guide

Microchip and many of our third-party partners offer development tools, software libraries and application hardware support to enable many industry standard functions.

Device Resources

Graphics Controller

The PIC24 product line now includes an integrated graphics controller that allows a designer to migrate beyond fixed-function, segmented LCDs to STN, TFT and OLED displays with up to VGA resolution in an affordable 16-bit family. The graphics controller contains graphic acceleration units, a Color Look-Up Table (CLUT) and a display controller providing a low cost system solution.

nanoWatt XLP Technology

Products featuring nanoWatt XLP bring advanced low power design techniques and Deep Sleep operating mode to 16-bit controllers, giving sleep currents as low as 20 nA. The Deep Sleep operating mode supports wake-up from a number of sources including RTCC capability with currents as low as 500 nA.













Charge Time Measurement Unit (CTMU)

The Charge Time Measurement Unit is a versatile peripheral that can be used to implement a capacitive touch-sense keypad, or to implement a timer or pulse delay with ns resolution. The CTMU includes dedicated hardware that is combined with the device's A/D to easily implement capacitive touch sense keypad matrix with a minimum of processor overhead.

USB On-the-Go

The PIC24 product line now offers products that include USB-OTG. The USB-OTG allows a product to be used as either an embedded host, a peripheral, or to negotiate to perform as either an embedded host or peripheral. USB can now be implemented in your 16-bit system, making it practical for your embedded system and computer to share many of the same peripherals.

Application Notes & Software Libraries and Hardware Support – see www.microchip.com for additional support

| | |
|--|---|
|  Graphics | Microchip Graphics library and the Graphics Display Designer (visual design tool) enable 16- and 32-bit products to design and run GUI interfaces on a color graphics displays. |
|  mTouch™ Capacitive Library | Microchip's mTouch Capacitive Touch stack provides an easy-to-use interface to enable integration of stylish touch interface features such as buttons, sliders and wheels. |
|  USB | Microchip's USB application notes enable our USB equipped 16- and 32-bit products for connection as an embedded host, peripheral or an OTG in many USB connected systems. |
|  ZigBee® | Microchip's ZigBee 2006 stack enables our 8-bit and 16-bit controller for connection to a ZigBee wireless network. ZigBee PRO also available. |
|  MiWi™ & MiWi P2P | Microchip's MiWi wireless stack enables our 8, 16- and 32-bit products with a light wireless networking protocol. |
|  TCP/IP | Microchip's TCP/IP stacks enable connection to the internet on the Microchip 8-, 16- and 32-bit products. |
|  File Systems | Microchip's Memory Disk Drive (FAT 16) and FAT 32 File Systems enable 8-, 16- and 32-bit Microchip products to utilize standard Flash media cards. |
|  Speech Playback | Microchip's speech solutions enable our 8- and 16-bit products for speech playback. |
|  IrDA® Stack | Microchip's IrDA stack allows 16-bit Microchip products to communicate using IrDA protocol. |
|  EEPROM Emulation | Microchip EEPROM Emulation application note allows a user to utilize program Flash as data EEPROM. |
|  Class B Safety | Class B Safety Software Library for PIC MCUs and dsPIC DSCs. |
|  Bootloaders | Microchip bootloaders allow for field software upgrades and are available to support all 16-bit products. |
| Encryption | Microchip provides a variety of encryption algorithms. Triple DES and AES algorithms are enabled on 8- and 16-bit controllers for as little as a \$5 handling fee. |

Third-Party Tool Support – see www.microchip.com/thirdparty for additional support

Common Development Environment

Microchip's MPLAB® tool chain supports all Microchip MCUs and DSCs from the smallest 8-bit PIC MCU, to our highest performance 32-bit PIC32 microcontrollers. Microchip's MPLAB IDE serves as the single, unified graphical user interface for Microchip and third-party software and hardware development tools.

MPLAB Integrated Development Environment (SW007002) – Free Download

- Full featured editor, simulator, debugger and program manager with color-coded context
- Supports all PIC MCUs and dsPIC® DSCs
- Powerful plug-ins for data monitor and control, motor control, RTOS viewer and others

MPLAB C Compiler and HI-TECH C® Compilers

- Full-featured ANSI-compatible compiler
- Completely integrated with MPLAB IDE
- Free “Evaluation” and “Lite” downloads available

MPLAB REAL ICE™ In-Circuit Emulation Kit (DV244005)

The MPLAB REAL ICE In-Circuit Emulator is Microchip's next-generation emulation and debugging system for easy and rapid application development and debugging.

MPLAB ICD 3 In-Circuit Debugger (DV164035)

The MPLAB ICD 3 is Microchip's standard real-time debugger with watch points, breakpoints, variable watch/modify, single and stepping from MPLAB C Compilers.

Hardware and Software Development Tools To Jump-Start Your Design

A variety of hardware and software development tools are available for the PIC24 family of microcontrollers, enabling you to shorten your design cycle. The development and evaluation tool chain provides easy migration between PIC24 families and dsPIC DSC applications.

PIC24F Starter Kit (DM240011)



- Inexpensive way to evaluate the 16-MIPs PIC24FJ256GB110 with USB-OTG
- Application demonstrations include mTouch capacitive sensing, driving an OLED display and USB-OTG to store data to a thumb drive

PIC24H Starter Kit (DM240021)



- Everything needed to begin using the 40 MIPS PIC24H128GP504 MCU
- Demonstrations include low cost speech play back, tri-axial analog accelerometer, and a differential input with analog conditioning circuitry to plug in a wide range of external sensors.

Explorer 16 Development Board (DM240001/2)



- Cost-effective development board for Microchip's 16-bit products
- Expansion connector accesses full device pinout and bread board prototyping area.
- PICtail Plus connector for future expansion boards

PICtail™ Plus Daughter Cards

(www.microchip.com/pictailplus)

PICtail Plus daughter cards are designed to plug into the expansion connections on the Explorer 16 board.

- Graphics (AC164127)
- Ethernet (AC164123)
- Motor Control (AC164128)
- USB (AC164131)
- IEEE 802.11 WiFi® (AC164136-4)
- MRF24J40MA 2.4 GHz (AC164134-1)
- CAN/LIN (AC164130)
- Speech Playback (AC164125)
- SD/MMC (AC164122)
- Prototyping (AC164126)
- IrDA® Standard (AC164124)
- And More...

Highlighted Boards

XLP 16-bit Development Board (DM240311)



- Low cost extreme low power 16-bit development board
- Supports the PIC24F16KA102, PIC24FJ64GA102 and PIC24F64GB002 families
- Multiple power sources, power test points
- PICtail connector for additional expansion such as the RF PICtail Card

PIC24FJ256DA210 Graphics Development Kit (DV164039)



- Development platform for the PIC24FJ256DA210 with integrated Graphics Controller
- 3.2" truly TFT Display with resistive touch screen support
- Prototype graphics boards and PICtail Plus expansion slots
- MPLAB ICD-3 Emulator and Debugger

Microstick for dsPIC33F and PIC24H Development Board (DM330013)



- Low Cost
- Integrated USB programmer/debugger – No external debugger required
- USB Powered – Ease of use, No external power required
- Socketed dsPIC/PIC24 – flexible, easy device replacement
- 0.025" pin headers – enables plug-in to breadboard with room for jumper wire

Support

Microchip is committed to supporting its customers in developing products faster and more efficiently. We maintain a worldwide network of field applications engineers and technical support ready to provide product and system assistance. In addition, the following service areas are available at www.microchip.com:

- **Support** link provides a way to get questions answered fast: <http://support.microchip.com>
- **Sample** link offers evaluation samples of any Microchip device: <http://sample.microchip.com>
- **Forum** link provides access to knowledge base and peer help: <http://forum.microchip.com>
- **Buy** link provides locations of Microchip Sales Channel Partners: www.microchip.com/sales

Sales Office Listing

AMERICAS

Atlanta

Tel: 678-957-9614

Boston

Tel: 774-760-0087

Chicago

Tel: 630-285-0071

Cleveland

Tel: 216-447-0464

Dallas

Tel: 972-818-7423

Detroit

Tel: 248-538-2250

Kokomo

Tel: 765-864-8360

Los Angeles

Tel: 949-462-9523

Santa Clara

Tel: 408-961-6444

Toronto

Mississauga, Ontario

Tel: 905-673-0699

EUROPE

Austria - Wels

Tel: 43-7242-2244-39

Denmark - Copenhagen

Tel: 45-4450-2828

France - Paris

Tel: 33-1-69-53-63-20

Germany - Munich

Tel: 49-89-627-144-0

Italy - Milan

Tel: 39-0331-742611

Netherlands - Drunen

Tel: 31-416-690399

Spain - Madrid

Tel: 34-91-708-08-90

UK - Wokingham

Tel: 44-118-921-5869

Training

If additional training interests you, then Microchip can help. We continue to expand our technical training options, offering a growing list of courses and in-depth curriculum locally, as well as significant online resources – whenever you want to use them.

- Regional Training Centers: www.microchip.com/rtc
- MASTERS Conferences: www.microchip.com/masters
- Worldwide Seminars: www.microchip.com/seminars
- eLearning: www.microchip.com/webseminars
- Resources from our Distribution and Third Party Partners www.microchip.com/training

ASIA/PACIFIC

Australia - Sydney

Tel: 61-2-9868-6733

China - Beijing

Tel: 86-10-8528-2100

China - Chengdu

Tel: 86-28-8665-5511

China - Hong Kong SAR

Tel: 852-2401-1200

China - Nanjing

Tel: 86-25-8473-2460

China - Qingdao

Tel: 86-532-8502-7355

China - Shanghai

Tel: 86-21-5407-5533

China - Shenyang

Tel: 86-24-2334-2829

China - Shenzhen

Tel: 86-755-8203-2660

China - Wuhan

Tel: 86-27-5980-5300

China - Xiamen

Tel: 86-592-2388138

China - Xian

Tel: 86-29-8833-7252

China - Zhuhai

Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore

Tel: 91-80-3090-4444

India - New Delhi

Tel: 91-11-4160-8631

India - Pune

Tel: 91-20-2566-1512

Japan - Yokohama

Tel: 81-45-471- 6166

Korea - Daegu

Tel: 82-53-744-4301

Korea - Seoul

Tel: 82-2-554-7200

Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857

Malaysia - Penang

Tel: 60-4-227-8870

Philippines - Manila

Tel: 63-2-634-9065

Singapore

Tel: 65-6334-8870

Taiwan - Hsin Chu

Tel: 886-3-6578-300

Taiwan - Kaohsiung

Tel: 886-7-536-4818

Taiwan - Taipei

Tel: 886-2-2500-6610

Thailand - Bangkok

Tel: 66-2-694-1351

3/26/09

Microcontrollers • Digital Signal Controllers • Analog • Memory • Wireless

Information subject to change. The Microchip name and logo, the Microchip logo, MPLAB, dsPIC and PIC are registered trademarks and PICKit, PICDEM, PICtail and REAL ICE are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. HI-TECH C is a registered trademark of Microchip Technology Incorporated in the U.S.A. © 2010 Microchip Technology Inc. All rights reserved. Printed in the U.S.A. 7/10 DS39754G



MICROCHIP
www.microchip.com

Microchip Technology Inc.
2355 W. Chandler Blvd.
Chandler, AZ 85224-6199