

rfPIC12F675 Transmitter Module

*Author: Steven Bible
Microchip Technology Inc.*

INTRODUCTION

The rfPIC12F675 is a low cost, high performance UHF short-range radio ASK transmitter design using Microchip's rfPIC12F675K for 315 MHz and rfPIC12F675F for 433.92 MHz. The module design is suitable for:

- Wireless remote command and control
- Remote Keyless Entry (RKE)
- Security systems
- Low power telemetry applications

A schematic of the rfPIC12F675 module, PCB layout, and Bill-of-Materials (BOM) are provided in the following sections. Gerber files are available on the rfPIC™ Development Kit 1 CD-ROM.

The transmitter modules can be ordered separately. See Table 1.

TABLE 1: TRANSMITTER MODULE ORDERING INFORMATION

	Order Number
Frequency	Single
315 MHz	AC164102
433.92 MHz	AC164103

rfPIC12F675 DESCRIPTION

The rfPIC12F675 (Figure 1) is a stand-alone transmitter module that can be used in a variety of ways. As designed for the rfPIC Development Kit 1, the transmitter module demonstrates many features of the rfPIC12F675 transmitter device. The transmitter module contains:

- 2 push-button switches connected to GP3 and GP4
- 2 potentiometers connected to GP0 and GP1
- RF enable (RFENIN) connected to GP5
- Data ASK (DATAASK) connected to GP2
- Optional 8-pin socket (U2) for In-Circuit Emulation (ICE) or inserting an 8-pin DIP package version of the PIC12F675.

Power Requirements

Pwr Sel jumper P1 selects one of two power sources for the rfPIC12F675:

- PICKit™ Starter Kit position (pins 1 and 2) – placing a jumper in the PICKit position allows the transmitter module to be powered from connector P2 pin 13. When the transmitter module is plugged in the PICKit expansion header J3, the transmitter module is powered from the PICKit Starter Kit.

Note: When programming the transmitter module in the PICKit Starter Kit, the Pwr Sel jumper P1 must be in the PICKit position (pins 1 and 2 jumpered).

- Batt position (pins 2 and 3) – placing a jumper in the batt position allows the transmitter model to be powered from the lithium coin cell battery. When powered from the battery, the transmitter module can be used in portable operation.

Programming the rfPIC12F675

The rfPIC12F675 can be programmed by the PICKit 1 FLASH Starter kit.

Step 1:

Remove the PIC16F676 or PIC12F676 from the PICKit Starter Kit evaluation socket.

Step 2:

Plug the transmitter module into the PICKit Starter Kit expansion header J3 (See Figure 2).

Step 3:

The rfPIC12F675 on the transmitter module now becomes the target programming device. Operate the PICKit Starter Kit in accordance with the steps outlined in the PICKit™ 1 FLASH Starter Kit User's Guide.

The transmitter module can be removed for stand-alone operation. Remember to set the Pwr Sel jumper for each mode of operation (See the Power Requirements section).

Note: There will be some harmless interaction with the LEDs on the PICKit Starter Kit and the rfPIC12F675. If the user desires, the LEDs can be removed from the circuit by clipping resistors R5, R6, R7 and R8.

FIGURE 1: rfPIC12F675 TRANSMITTER MODULE


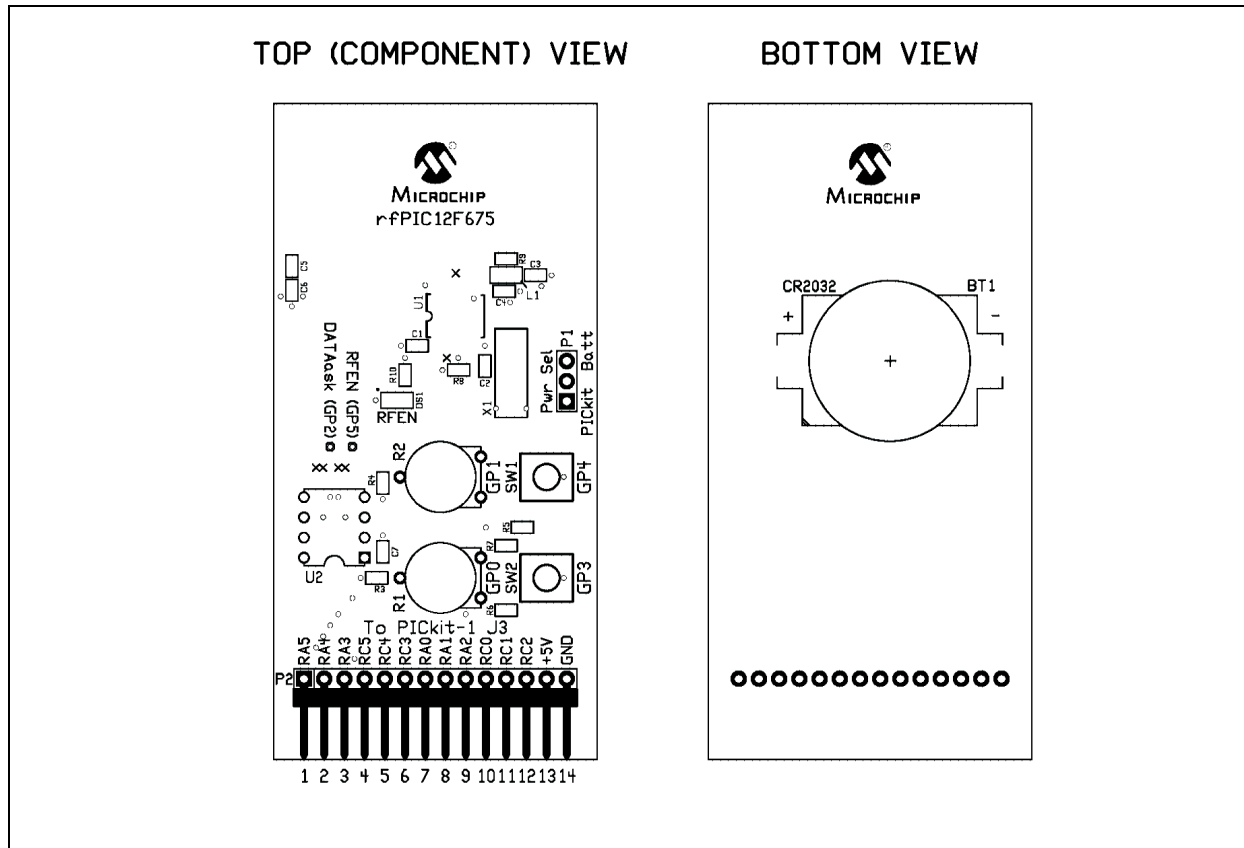


FIGURE 2: PROGRAMMING THE rfPIC12F675 TRANSMITTER MODULE IN THE PICKIT FLASH STARTER KIT

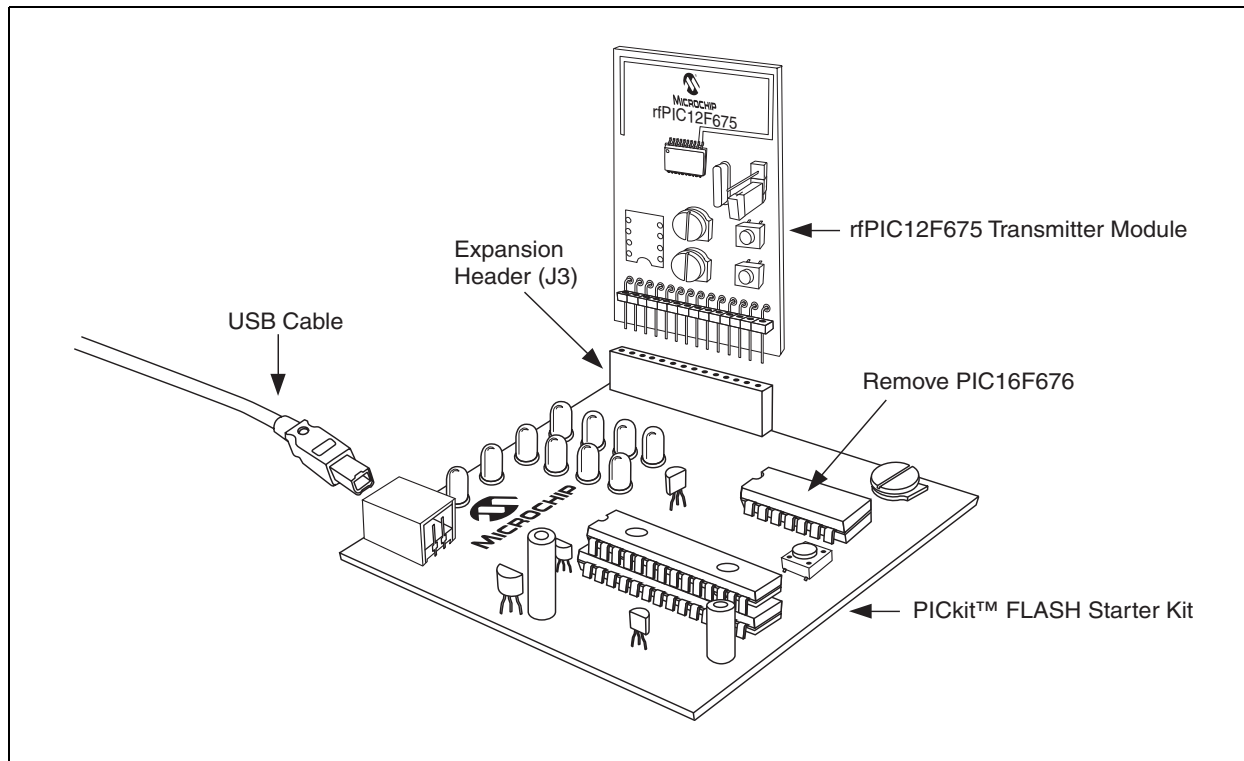

Optional 8-pin Socket U2

Socket U2 is an unpopulated 8-pin DIP connection on the transmitter module. A user-provided 8-pin IC socket can be soldered in place.

To use socket U2, the user must disconnect the internal PIC12F675 PICmicro[®] microcontroller internal to the rfPIC12F675 device from the circuits on the module. This is accomplished by cutting six PCB traces marked by silk-screened "x".

Socket U2 can be used for:

- In-Circuit Emulation (ICE) with an MPLAB[®] ICE 2000 and ICD2
- Inserting an 8-pin DIP version of the PIC12F675. The DIP PICmicro microcontroller can be programmed externally (such as a PICSTART[®] Plus or PRO MATE[®] II) or internally via the PICkit Starter Kit.

A detailed description of the rfPIC12F675K/675F/675H microcontroller with UHF ASK/FSK transmitter is provided in the data sheet, DS70091.


A detailed description of the rfPIC12F675 transmitter module antenna design is provided in the application note, AN868 .

Table 2 lists the pinout associated with the rfPIC12F675 receiver module.

TABLE 2: rfPIC12F675 TRANSMITTER MODULE PINOUT

Pin	Description
1	GP5
2	GP4
3	GP3
4, 5, 6	No Connection
7	GP0
8	GP1
9	GP2
10, 11, 12	No Connection
13	Power: 2.0-5.5 VDC
14	Ground

FIGURE 3: rPIC12F675 SCHEMATIC

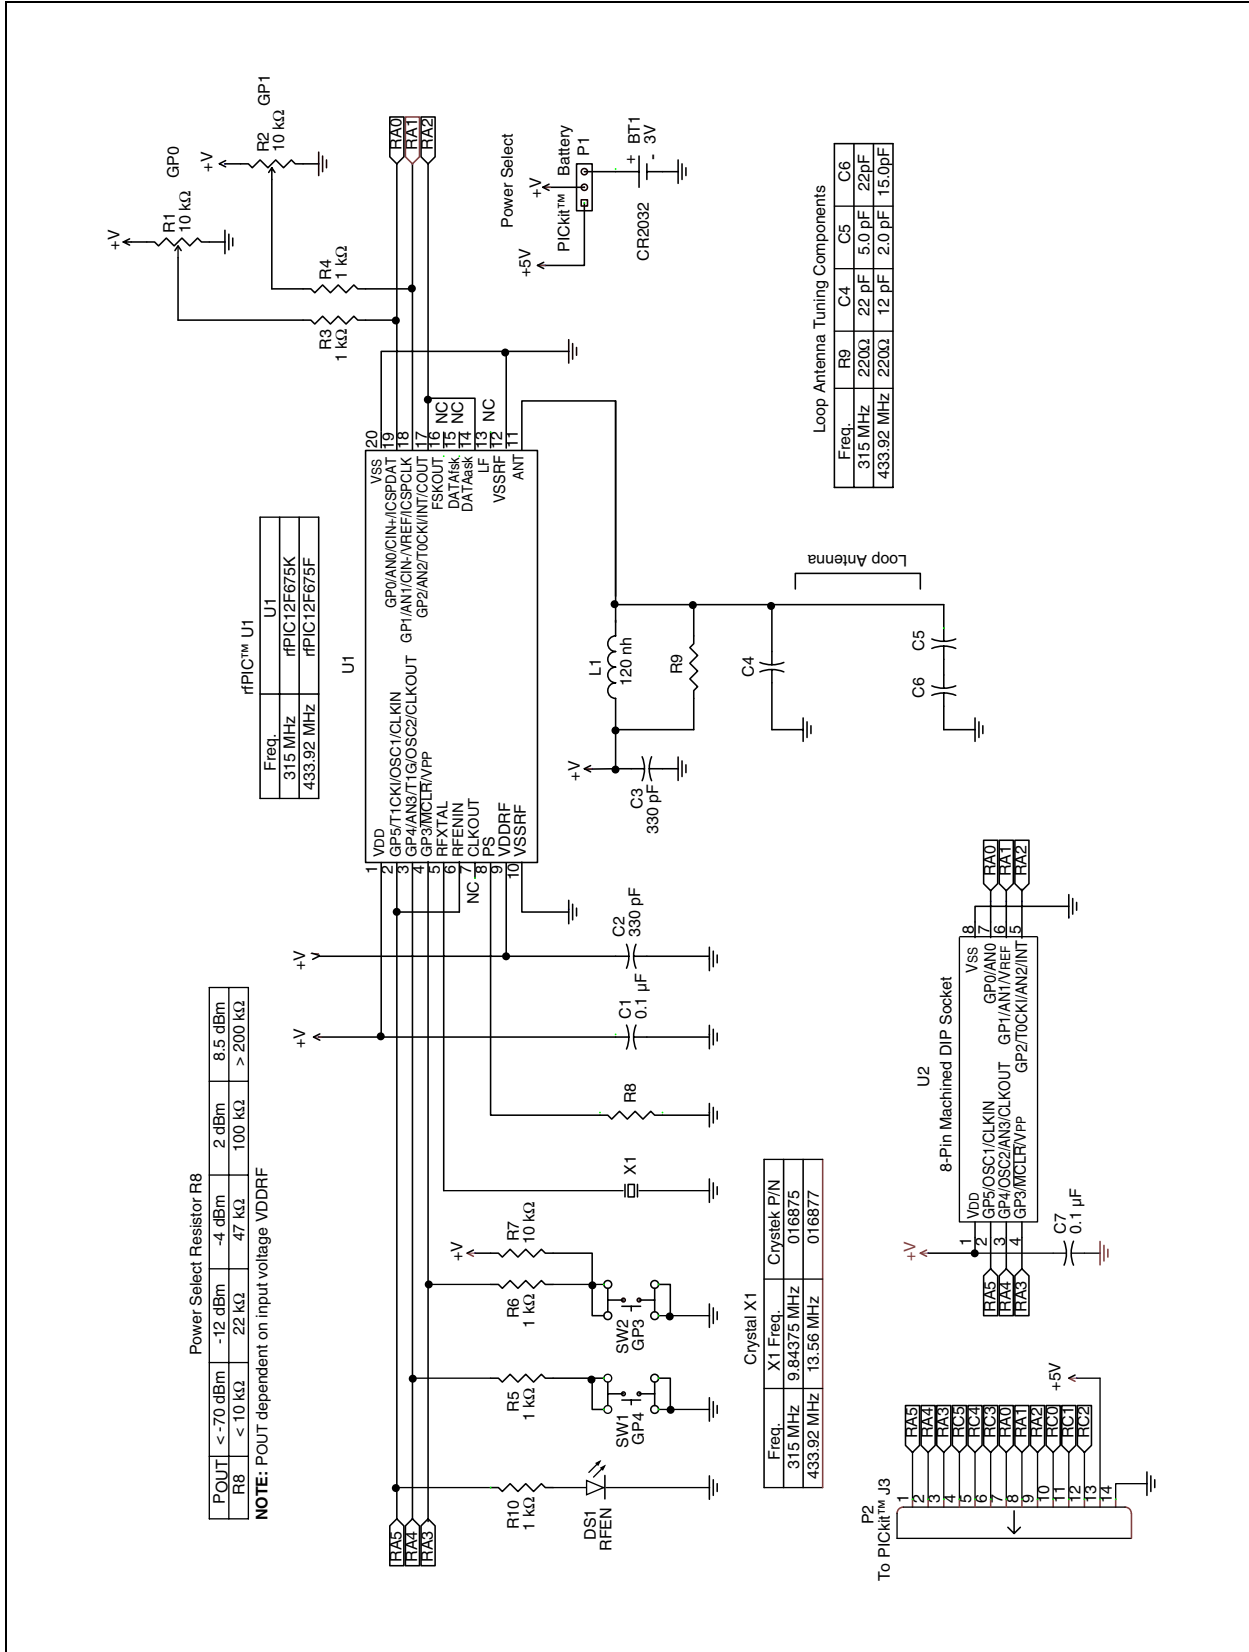

PCB LAYOUT

The following diagrams show the various layers of the rPIC12F675 transmitter module printed circuit board.

FIGURE 4: rPIC12F675 TRANSMITTER MODULE TOP SILK-SCREEN

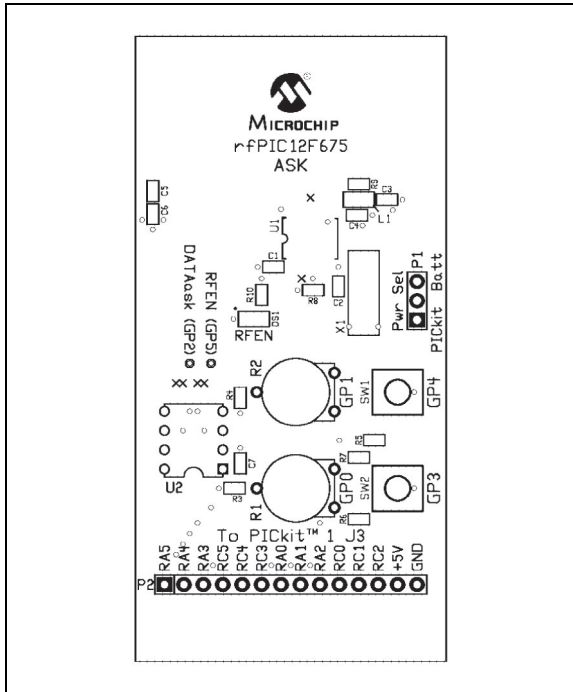


FIGURE 5: rPIC12F675 TRANSMITTER MODULE TOP COPPER


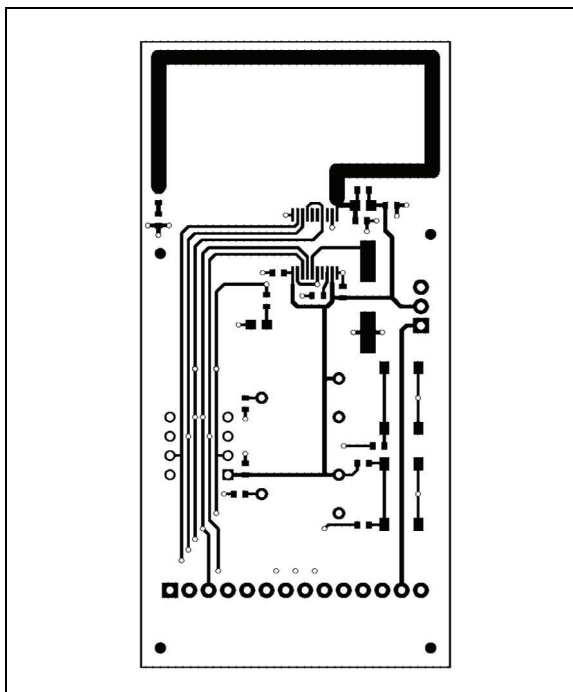


FIGURE 6: rPIC12F675 TRANSMITTER MODULE BOTTOM COPPER

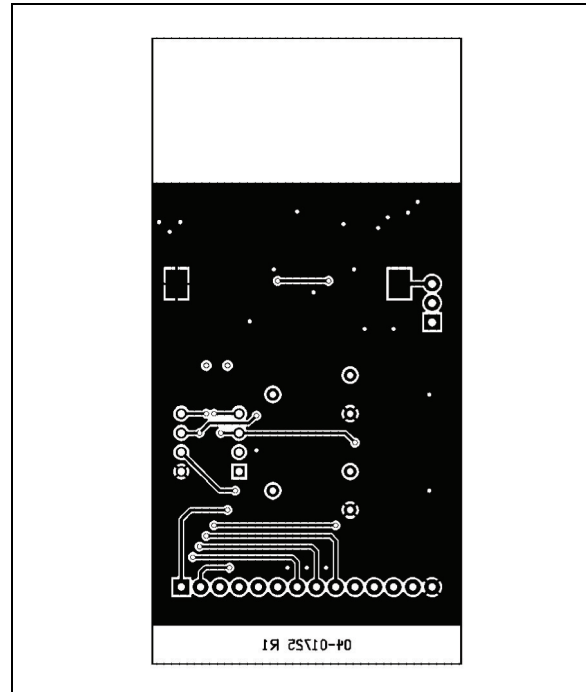

GERBER FILES

Gerber Files for the rPIC12F675 transmitter module are available on the rPIC™ Development Kit 1 CD-ROM.

THIRD PARTY COMPONENT SUPPLIERS

Crystek Crystal Corporation

12730 Commonwealth Drive
Fort Myers, FL 33913

Toll Free: 1-800-237-3061

Phone: 1-239-561-3311

Fax: 1-239-561-1025

E-mail: salesdept@crystek.com

Internet: <http://www.crystek.com>

FIGURE 7: rfPIC12F675 TRANSMITTER MODULE BILL-OF-MATERIALS

rfPIC12F675 Transmitter Module Bill-of-Materials						
Quantity	Designator	Value	Description	Order From	Part Number	
1	C4 - 315 MHz	22 pF, NP0, 0603	Capacitor, Ceramic Chip	Digi-Key	PCC220ACVTR-ND	
1	C4 - 433.92 MHz	12 pF, NP0, 0603	Capacitor, Ceramic Chip	Digi-Key	PCC120ACVTR-ND	
1	C5 - 315 MHz	5.0 pF, NP0, 0603	Capacitor, Ceramic Chip	Digi-Key	PCC050CVTR-ND	
1	C5 - 433.92 MHz	2.0 pF, NP0, 0603	Capacitor, Ceramic Chip	Digi-Key	PCC020CVTR-ND	
1	C6 - 315 MHz	22 pF, NP0, 0604	Capacitor, Ceramic Chip	Digi-Key	PCC220ACVTR-ND	
1	C6 - 433.92 MHz	15 pF, NP0, 0604	Capacitor, Ceramic Chip	Digi-Key	PCC150ACVTR-ND	
2	C2, C3	330 pF, X7R, 0603	Capacitor, Ceramic Chip	Digi-Key	PCC331ACVTR-ND	
2	C1, C7	0.1 uF, X7R, 0603	Capacitor, Ceramic Chip	Digi-Key	PCC1762TR-ND	
1	R8	Not Populated				
2	R9	220 ohm, 0603	Resistor, Chip, Thick Film	Digi-Key	P220GTR-ND	
4	R3, R4, R5, R6, R10	1K ohm, 0603	Resistor, Chip, Thick Film	Digi-Key	P1.0KGT-ND	
1	R7	10K ohm, 0603	Resistor, Chip, Thick Film	Digi-Key	P10KGT-ND	
1	R1	220K ohm, 0603	Resistor, Chip, Thick Film	Digi-Key	P220KGT-ND	
2	R1, R2	10K ohm	Potentiometer	Digi-Key	3352E-103-ND	
1	DS1	SMT LED 0805		Digi-Key	67-1552-1-ND	
1	L1	120 nH, 0805	Inductor, Chip	Digi-Key	TKS2387CT-ND	
1	P1	3-pin header	Single row 0.025" square header	Digi-Key	S-1012-03-ND	
1	P2	14-Pin Right Angle Header	Single row 0.025" square right angle post	Digi-Key	A26510-ND	
1		2-pin shunt		Digi-Key	S9000-ND	
1	BT1	KS1060	Coin Cell Battery Holder	Digi-Key	1060KTR-ND	
1	Battery	CR2032	Lithium Cell Battery	Digi-Key	P189-ND	
2	SW1, SW2		Pushbutton switch	Digi-Key	SW415-ND	
1	X1 - 315 MHz	9.84375 MHz	Crystal, HC-49/S	Crystek	016875	
1	X1 - 433.92 MHz	13.56 MHz	Crystal, HC-49/S	Crystek	016877	
1	U1 - 315 MHz	rfPIC12F675K	Transmitter + PICmicro® MCU	Microchip	rfPIC12F675K	
1	U1 - 433.92 MHz	rfPIC12F675F	Transmitter + PICmicro® MCU	Microchip	rfPIC12F675F	
1	U2		8-pin machined socket	Digi-Key	ED3108-ND	

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is intended through suggestion only and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, KEELOQ, MPLAB, PIC, PICmicro, PICSTART, PRO MATE and PowerSmart are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.


FilterLab, microID, MXDEV, MXLAB, PICMASTER, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.


Accuron, Application Maestro, dsPIC, dsPICDEM, dsPICDEM.net, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, microPort, Migratable Memory, MPASM, MPLIB, MPLINK, MPSIM, PICC, PICkit, PICDEM, PICDEM.net, PowerCal, PowerInfo, PowerMate, PowerTool, rLAB, rPIC, Select Mode, SmartSensor, SmartShunt, SmartTel and Total Endurance are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

Serialized Quick Turn Programming (SQTP) is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2003, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

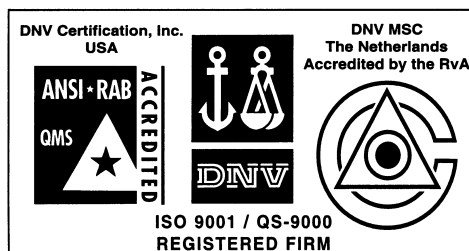

Microchip received QS-9000 quality system certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona in July 1999 and Mountain View, California in March 2002. The Company's quality system processes and procedures are QS-9000 compliant for its PICmicro® 8-bit MCUs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, non-volatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001 certified.



WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200 Fax: 480-792-7277
Technical Support: 480-792-7627
Web Address: <http://www.microchip.com>

Atlanta

3780 Mansell Road, Suite 130
Alpharetta, GA 30022
Tel: 770-640-0034 Fax: 770-640-0307

Boston

2 Lan Drive, Suite 120
Westford, MA 01886
Tel: 978-692-3848 Fax: 978-692-3821

Chicago

333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

4570 Westgrove Drive, Suite 160
Addison, TX 75001
Tel: 972-818-7423 Fax: 972-818-2924

Detroit

Tri-Atria Office Building
32255 Northwestern Highway, Suite 190
Farmington Hills, MI 48334
Tel: 248-538-2250 Fax: 248-538-2260

Kokomo

2767 S. Albright Road
Kokomo, IN 46902
Tel: 765-864-8360 Fax: 765-864-8387

Los Angeles

18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 949-263-1888 Fax: 949-263-1338

Phoenix

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7966 Fax: 480-792-4338

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

Toronto

6285 Northam Drive, Suite 108
Mississauga, Ontario L4V 1X5, Canada
Tel: 905-673-0699 Fax: 905-673-6509

ASIA/PACIFIC

Australia

Microchip Technology Australia Pty Ltd
Marketing Support Division
Suite 22, 41 Rawson Street
Epping 2121, NSW
Australia
Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Microchip Technology Consulting (Shanghai)
Co., Ltd., Beijing Liaison Office
Unit 915
Bei Hai Wan Tai Bldg.
No. 6 Chaoyangmen Beidajie
Beijing, 100027, No. China
Tel: 86-10-85282100 Fax: 86-10-85282104

China - Chengdu

Microchip Technology Consulting (Shanghai)
Co., Ltd., Chengdu Liaison Office
Rm. 2401-2402, 24th Floor,
Ming Xing Financial Tower
No. 88 TIDU Street
Chengdu 610016, China
Tel: 86-28-86766200 Fax: 86-28-86766599

China - Fuzhou

Microchip Technology Consulting (Shanghai)
Co., Ltd., Fuzhou Liaison Office
Unit 28F, World Trade Plaza
No. 71 Wusi Road
Fuzhou 350001, China
Tel: 86-591-7503506 Fax: 86-591-7503521

China - Hong Kong SAR

Microchip Technology Hongkong Ltd.
Unit 901-6, Tower 2, Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2401-1200 Fax: 852-2401-3431

China - Shanghai

Microchip Technology Consulting (Shanghai)
Co., Ltd.
Room 701, Bldg. B
Far East International Plaza
No. 317 Xian Xia Road
Shanghai, 200051
Tel: 86-21-6275-5700 Fax: 86-21-6275-5060

China - Shenzhen

Microchip Technology Consulting (Shanghai)
Co., Ltd., Shenzhen Liaison Office
Rm. 1812, 18/F, Building A, United Plaza
No. 5022 Binhe Road, Futian District
Shenzhen 518033, China
Tel: 86-755-82901380 Fax: 86-755-8295-1393

China - Qingdao

Rm. B505A, Fullhope Plaza,
No. 12 Hong Kong Central Rd.
Qingdao 266071, China
Tel: 86-532-5027355 Fax: 86-532-5027205

India

Microchip Technology Inc.
India Liaison Office
Marketing Support Division
Divyasree Chambers
1 Floor, Wing A (A3/A4)
No. 11, O'Shaughnessy Road
Bangalore, 560 025, India
Tel: 91-80-2290061 Fax: 91-80-2290062

Japan

Microchip Technology Japan K.K.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa, 222-0033, Japan
Tel: 81-45-471-6166 Fax: 81-45-471-6122

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea 135-882
Tel: 82-2-554-7200 Fax: 82-2-558-5934

Singapore

Microchip Technology Singapore Pte Ltd.
200 Middle Road
#07-02 Prime Centre
Singapore, 188980
Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan

Microchip Technology (Barbados) Inc.,
Taiwan Branch
11F-3, No. 207
Tung Hua North Road
Taipei, 105, Taiwan
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

Austria

Microchip Technology Austria GmbH
Durisolstrasse 2
A-4600 Wels

Austria

Tel: 43-7242-2244-399
Fax: 43-7242-2244-393

Denmark

Microchip Technology Nordic ApS
Regus Business Centre
Lautrup høj 1-3
Ballerup DK-2750 Denmark
Tel: 45-4420-9895 Fax: 45-4420-9910

France

Microchip Technology SARL
Parc d'Activite du Moulin de Massy
43 Rue du Saule Trapu
Batiment A - Ier Etage
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Microchip Technology GmbH
Steinheilstrasse 10
D-85737 Ismaning, Germany
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy

Microchip Technology SRL
Via Quasimodo, 12
20025 Legnano (MI)
Milan, Italy
Tel: 39-0331-742611 Fax: 39-0331-466781

United Kingdom

Microchip Ltd.
505 Eskdale Road
Wokingham
Wokingham
Berkshire, England RG41 5TU
Tel: 44-118-921-5869 Fax: 44-118-921-5820

05/30/03